WAC LIGHTING

Lotos Adj – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	Watt	Finish
❍ R4ERAR	❍ W 45	2700K/3000K/3500K/4000K/5000K - 90	800	9W	❍ FWT White (Fire Rated)

Example: **R4ERAR-W9CS-FWT**
For custom requests please contact customs@waclighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

• Fire Rated - ASTM E119, UL 263, ULC S101 and tested and certified for 2 hours
• 5-CCT Switchable between 2700K and 5000K
• Multiple LED array for uniform illumination
• Rotatable multi-axis gimbal ring
• Minimum Plenum Space Required: 4 1/2"
• Driver included
• 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120-277 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Wet Location Listed
Construction	Steel with frosted TIR lens

FINISHES:

White (Fire Rated)

LINE DRAWING

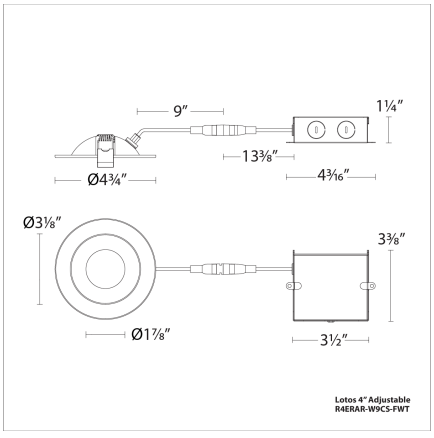

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2026

WAC LIGHTING

Lotos Adj – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	Watt	Finish
❍ R6ERAR	❍ W 45	2700K/3000K/3500K/4000K/5000K - 90	1320	15W	❍ FWT White (Fire Rated)

Example: **R6ERAR-W9CS-FWT**
For custom requests please contact customs@waclighting.com

DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

FEATURES

• Fire Rated - ASTM E119, UL 263, ULC S101 and tested and certified for 2 hours
• 5-CCT Switchable between 2700K and 5000K
• Multiple LED array for uniform illumination
• Rotatable multi-axis gimbal ring
• Minimum Plenum Space Required: 4 1/2"
• Driver included
• 5 year warranty

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K/5000K
Input:	120-277 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Standards:	ETL, cETL, Title 24 JA8 Compliant, Wet Location Listed
Construction	Steel with frosted TIR lens

FINISHES:

White (Fire Rated)

LINE DRAWING

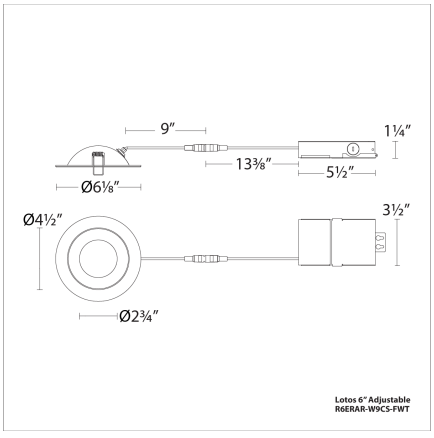

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2026

WAC LIGHTING

Lotos Adj – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

	Model	*Description*	*Finish*
	RER-FRAME	Lotos	

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2026