

WAC LIGHTING

Flatte

Bath & Wall Sconce 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS103624 24"	2700K/3000K/3500K/4000K	AB Aged Brass BC Black Chrome	14.5W	1522	1346

Example: **WS103624-BC**

For custom requests please contact customs@wacighting.com

DESCRIPTION

With its slim profile and softly diffused glow, Flatte brings understated elegance to any interior. ADA-compliant and beautifully minimal, it's perfect for narrow spaces and modern design schemes.

FEATURES


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, ADA, Damp Location Listed
Construction	Aluminum body with acrylic diffuser



FINISHES:



LINE DRAWING

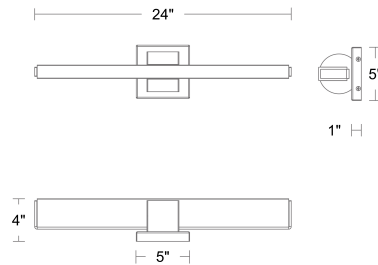

WS103624

WAC LIGHTING

Flatte

Bath & Wall Sconce 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS103634 34"	2700K/3000K/3500K/4000K	AB Aged Brass BC Black Chrome	20.2W	2360	1999

Example: **WS103634-BC**

For custom requests please contact customs@wacighting.com

DESCRIPTION

With its slim profile and softly diffused glow, Flatte brings understated elegance to any interior. ADA-compliant and beautifully minimal, it's perfect for narrow spaces and modern design schemes.

FEATURES


- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy
- Driver included
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, ADA, Damp Location Listed
Construction	Aluminum body with acrylic diffuser



FINISHES:



LINE DRAWING

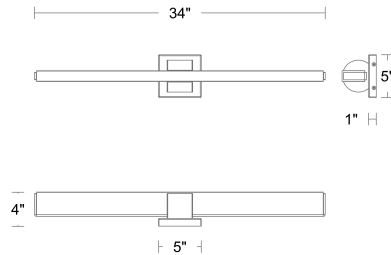

WS103634