Fixture Type:

Catalog Number:

Project:

Location:

WAC LIGHTING

Highwire

Pendant 3000K

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ PD-19043 43"	3000K	❍ BK Black	23W	1150	758

Example: **PD-19043-BK**
For custom requests please contact customs@waclighting.com

DESCRIPTION

A perfect balancing act. Feather-light yet substantial.

FEATURES

• Six 12” and two 6” downrods included for PD-19050; Three 12” and one 6” downrods included for PD-19043 (additional downrods available)
• Slope ceiling adaptable. Hang straight swivel up to 90 degrees. PD-19043 only
• Driver conceals within the canopy
• Quick spin-on canopy design with minimal hardware for easy installation, PD-19043 only
• Driver concealed within the canopy
• 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Steel hardware with frosted acrylic diffuser

REPLACEMENT PARTS

ROD-S06-PC095T-BK - Rod (texture BK)
ROD-S12-PC095T-BK - Rod (texture BK)
RPL-GLA-19050 - Acrylic

FINISHES:

Black

LINE DRAWING

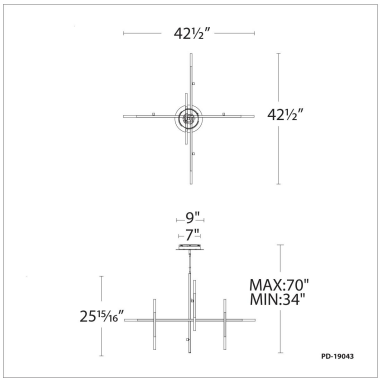

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026

WAC LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

Highwire

Pendant 3000K

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ PD-19050 50"	3000K	❍ BK Black	20W	1000	801

Example: **PD-19050-BK**
For custom requests please contact customs@waclighting.com

DESCRIPTION

A perfect balancing act. Feather-light yet substantial.

FEATURES

• Six 12” and two 6” downrods included for PD-19050; Three 12” and one 6” downrods included for PD-19043 (additional downrods available)
• Slope ceiling adaptable. Hang straight swivel up to 90 degrees. PD-19043 only
• Driver conceals within the canopy
• Quick spin-on canopy design with minimal hardware for easy installation, PD-19043 only
• Driver concealed within the canopy
• 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Steel hardware with frosted acrylic diffuser

FINISHES:

Black

REPLACEMENT PARTS

ROD-S06-PC095T-BK - Rod (texture BK)
ROD-S12-PC095T-BK - Rod (texture BK)
RPL-GLA-19050 - Acrylic

LINE DRAWING

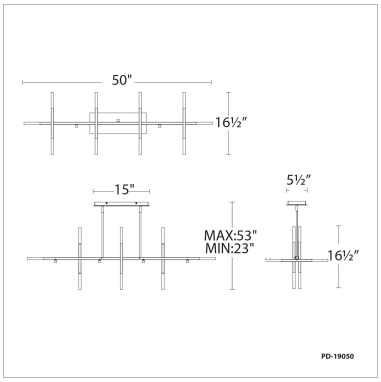

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026