

# WAC LIGHTING

## Interlace

### Round Multi Light 4CCT

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47803R 21" - 3 Lights	2700K/3000K/3500K/4000K - 90	64 W	2902	BK Black CH Chrome

Example: **PD-47803R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


<b>Color Temp:</b>	2700K/3000K/3500K/4000K
<b>Input:</b>	120-277V,50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Standards:</b>	ETL, cETL, Damp Location Listed
<b>Construction</b>	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

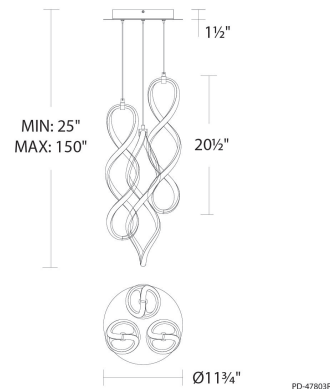

# WAC LIGHTING

## Interlace

### Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47805R 21" - 5 Lights	2700K/3000K/3500K/4000K - 90	107 W	4837	BK Black CH Chrome

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-47805R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


<b>Color Temp:</b>	2700K/3000K/3500K/4000K
<b>Input:</b>	120-277V,50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Standards:</b>	ETL, cETL, Damp Location Listed
<b>Construction</b>	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

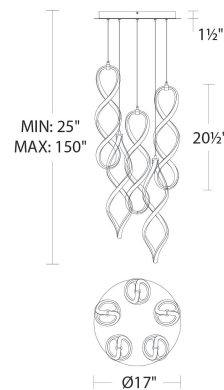

# WAC LIGHTING

## Interlace

### Round Multi Light 4CCT

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47809R 21" - 9 Lights	2700K/3000K/3500K/4000K - 90	193 W	8707	BK Black CH Chrome

Example: **PD-47809R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES

- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


<b>Color Temp:</b>	2700K/3000K/3500K/4000K
<b>Input:</b>	120-277V, 50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Standards:</b>	ETL, cETL, Damp Location Listed
<b>Construction</b>	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

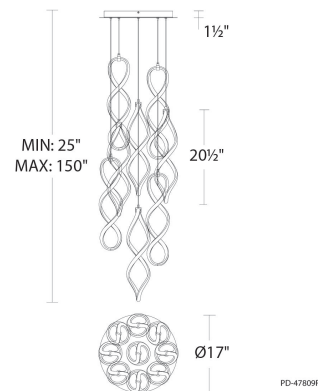

# WAC LIGHTING

## Interlace

### Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47815R 21" - 15 Lights	2700K/3000K/3500K/4000K - 90	321 W	14511	BK Black CH Chrome

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-47815R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION

Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS


<b>Color Temp:</b>	2700K/3000K/3500K/4000K
<b>Input:</b>	120-277V,50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Standards:</b>	ETL, cETL, Damp Location Listed
<b>Construction</b>	Aluminum body, silicone diffuser



#### FINISHES:



#### LINE DRAWING:

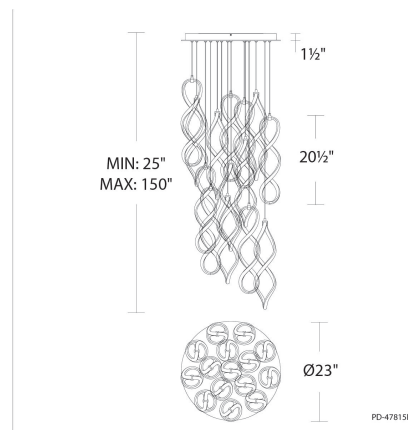

# WAC LIGHTING

## Interlace

### Round Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-47821R 21" - 21 Lights	2700K/3000K/3500K/4000K - 90	450 W	20316	BK Black CH Chrome

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **PD-47821R-CH**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### DESCRIPTION


Showers of light. Delicate bands of soft LED illumination weave playfully in a downward flowing motion from its geometric canopy above.

#### FEATURES


- Omnidirectional diffused illumination
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body, silicone diffuser

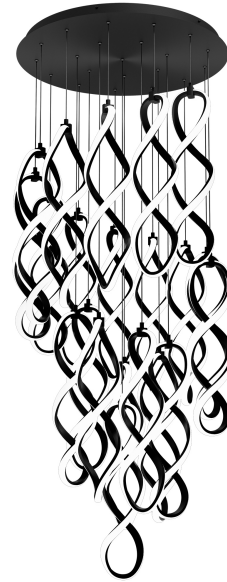

#### FINISHES:



#### LINE DRAWING:

