

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Locke

## Bath & Wall Light 3000K

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-30018 18"	3000K	AB Aged Brass BN Brushed Nickel	21W	1580	1270

Example: **WS-30018-BN**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Timeless yet contemporary. Frosted opal glass shades embraced by elegantly tailored hardware.

### FEATURES

- Up and downlight with opal glass diffuser
- Unique, faceted diamond backplate
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 Year warranty

### SPECIFICATIONS


<b>Color Temp:</b>	3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Can be mounted on wall in all orientations
<b>Standards:</b>	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
<b>Construction</b>	Aluminum hardware with opal glass diffuser



### FINISHES:



### LINE DRAWING:

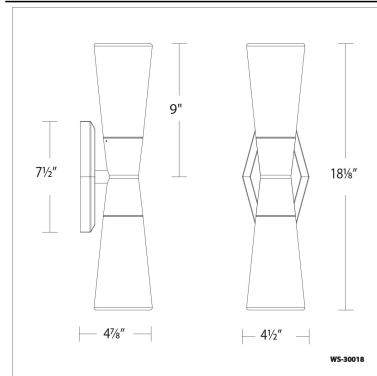

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

# Locke

## Bath & Wall Light 3000K

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-30024 24"	3000K	AB Aged Brass BN Brushed Nickel	32 W	2937	2291

Example: **WS-30024-BN**  
 For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

### DESCRIPTION

Timeless yet contemporary. Frosted opal glass shades embraced by elegantly tailored hardware.

### FEATURES

- Up and downlight with opal glass diffuser
- Unique, faceted diamond backplate
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 Year warranty



### SPECIFICATIONS

<b>Color Temp:</b>	3000K
<b>Input:</b>	120 VAC, 50/60Hz
<b>CRI</b>	90
<b>Dimming:</b>	ELV: 100-10% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Can be mounted on wall in all orientations
<b>Standards:</b>	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
<b>Construction</b>	Aluminum hardware with opal glass diffuser

### FINISHES:



### REPLACEMENT PARTS

RPL-GLA-30024 - RPL Glass for WS-30024

### LINE DRAWING:

