

# WAC LIGHTING

## Ocularc 3.0

### Remodel Housing

Model & Product

R3BBRT-10 Ocularc 3.0 LED Remodel IC-Rated Housing

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Example: **R3BBRT-10**

#### DESCRIPTION


Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Driver concealed within the fixture
- 5 year warranty

#### SPECIFICATIONS

<b>Construction</b>	20 gauge cold rolled steel wiring box
<b>Power:</b>	11W
<b>Input:</b>	120 -277 VAC,50/60Hz
<b>Dimming:</b>	ELV: 100-5% , 0-10V: 100-5% , TRIAC: 100-5%
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips secures housing firmly to ceiling
<b>Cut Out:</b>	4 1/4"
<b>Ceiling Thickness:</b>	1/2" - 1"
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, IC

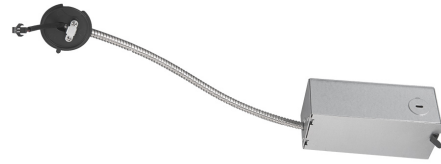

# WAC LIGHTING

## Ocularc 3.0

0° - 35° Adjustable Round

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish	
R3BRA	F 50°	927 2700K - 90	900	1196	BK Black	
		930 3000K - 90	970	1285	BN Brushed Nickel	
		927 2700K - 90	915	2513	WT White	
	N 25°	930 3000K - 90	985	2701		
		927 2700K - 90	900	4384		
		930 3000K - 90	970	4712		
	S 15°					

Example: **R3BRA-F927-BK**

### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

### FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

### SPECIFICATIONS

<b>Construction</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electrostatically Powder Coated: Black, Electroplated Brushed Nickel, White
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight



### FINISHES:



# WAC LIGHTING

## Ocularc 3.0

### Downlight Round

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRD	F 50°	927 2700K - 90	900	1308	BK Black
		930 3000K - 90	970	1406	BN Brushed Nickel
	N 25°	927 2700K - 90	895	2767	HZWT Haze/White
		930 3000K - 90	965	2973	WT White
	S 15°	927 2700K - 90	895	4776	
		927 2700K - 90	895	4776	
		930 3000K - 90	965	5132	

Example: **R3BRD-F927-BK**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

#### SPECIFICATIONS

<b>Construction</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electrostatically Powder Coated: White, Enamel Coated Haze/White, Electroplated Brushed Nickel, Black
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight



#### FINISHES:



# WAC LIGHTING

## Ocularc 3.0

### Polycarbonate Downlight Round

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BRDP	F 50°	927 2700K - 90	950	1294	WT White
		930 3000K - 90	1015	1382	
	N 25°	927 2700K - 90	950	2778	
		930 3000K - 90	1025	2985	
	S 15°	927 2700K - 90	955	4918	
		930 3000K - 90	1005	5144	

Example: **R3BRDP-F927-WT**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Single spot light source
- Conforms to local code dead front requirements
- 5 year warranty

#### SPECIFICATIONS

<b>Construction</b>	Polycarbonate trim and die-cast aluminum heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electrostatically Powder Coated: White
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight



#### FINISHES:



White

# WAC LIGHTING

## Ocularc 3.0

0° - 35° Adjustable Square

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BSA	F 50°	927 2700K - 90	900	1196	BK Black
		930 3000K - 90	970	1285	BN Brushed Nickel
	N 25°	927 2700K - 90	915	2513	WT White
		930 3000K - 90	985	2701	
	S 15°	927 2700K - 90	900	4384	
		930 3000K - 90	970	4712	

Example: **R3BSA-F927-BK**

### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

### FEATURES


- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

### SPECIFICATIONS

<b>Construction</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electrostatically Powder Coated: White, Electroplated Brushed Nickel, Black
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight



### FINISHES:



# WAC LIGHTING

## Ocularc 3.0

### Downlight Square

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R3BSD	F 50°	927 2700K - 90	850	1240	BK Black
		930 3000K - 90	915	1333	BN Brushed Nickel
	N 25°	927 2700K - 90	860	2485	HZWT Haze/White
		930 3000K - 90	860	2485	WT White
	S 15°	930 3000K - 90	925	2671	
		927 2700K - 90	865	4382	
		930 3000K - 90	930	4710	

Example: **R3BSD-F927-BK**

#### DESCRIPTION

Engineered with state of the art LED and driver technology, Ocularc 3.0, 2.0, 1.0 family of recessed lighting offers various styles, IC and Airtight Rated New Construction and Remodel, and low glare optical distributions to beautifully illuminate a diverse range of applications.

#### FEATURES

- Shallow housing under 4in depth
- Single spot light source
- 5 year warranty

#### SPECIFICATIONS

<b>Construction</b>	Die-cast aluminum trim and heat sink
<b>Power:</b>	11W
<b>Light Source:</b>	Integrated LED, 3 Step Mac Adam Ellipse
<b>Rated Life:</b>	50,000 Hours
<b>Mounting:</b>	Heavy gauge retention clips support trim firmly
<b>Finish:</b>	Electroplated White, Enamel Coated Haze/White, Enamel Coated Brushed Nickel, Electroplated Black
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	ETL, cETL, Wet Location Listed, Energy Star 2.0, Title 24 JA8 Compliant, Airtight



#### FINISHES:

