

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Rubix

5" & 10" Ceiling Mount 3000K

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
FM-W2505 5"	2 3000K 90	16W	945	AL Brushed
FM-W2510 10"		30W	1875	Aluminum
		31W	2139	BK Black BZ Bronze GH Graphite WT White

Example: **FM-W2505-AL**

DESCRIPTION

This versatile Rubix model is available for both wall and ceiling mounting. Die-cast aluminum constructed with etched glass for durability in exterior environments, Rubix delivers a substantial lumen output with a minimalist design.

FEATURES


- Title 24 may not be available for all finishes, check for availability
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast Aluminum
Power:	16W, 30W, 31W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70,000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on ceiling or wall in all orientations
Finish:	Electrostatically Powder Coated: Powder Coat Graphite Graphite, Black, Powder Coat Bronze Bronze, Powder Coat White White, Brushed Aluminum with Clear Powder Coat Brushed Aluminum
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



FINISHES:

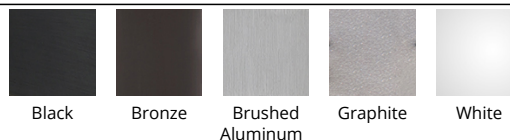

LINE DRAWING:

