

WAC LIGHTING

Sirius

Pendant 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-81118 18"	3000K	AB Aged Brass AL Brushed Aluminum BK Brushed Black WT White	36W	2493	1217

Example: **PD-81118-WT**
 For custom requests please contact customs@wacighting.com

DESCRIPTION

Full circle. A simple glowing halo completes.

FEATURES

- Up and downlight with recessed silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, silicone diffuser

REPLACEMENT PARTS


HDW-SY21-CE - Hardware Pack



FINISHES:

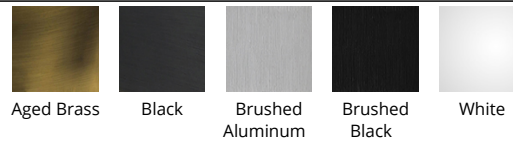

LINE DRAWING:

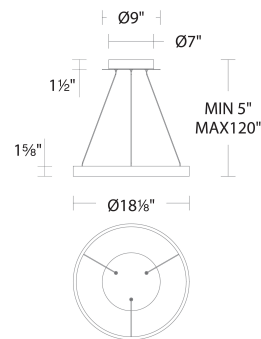

PD-81118

WAC LIGHTING

Sirius

Pendant 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-81124 24"	3000K	AB Aged Brass AL Brushed Aluminum BK Brushed Black WT White	49W	3480	1721

Example: **PD-81124-WT**
 For custom requests please contact customs@wacighting.com

DESCRIPTION

Full circle. A simple glowing halo completes.

FEATURES

- Up and downlight with recessed silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, silicone diffuser

REPLACEMENT PARTS


HDW-SY21-CE - Hardware Pack



FINISHES:

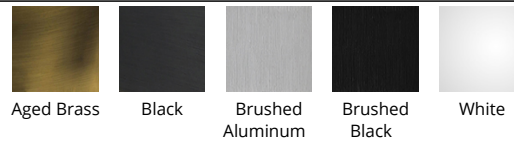

LINE DRAWING:

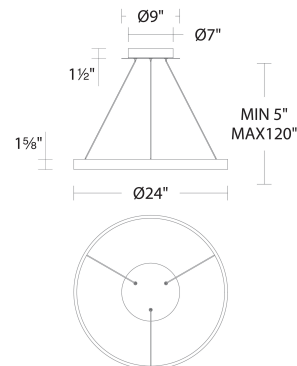

PD-81124

WAC LIGHTING

Sirius

Pendant 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-81131 31"	3000K	AB Aged Brass AL Brushed Aluminum BK Brushed Black WT White	69W	4763	2057

Example: **PD-81131-WT**
 For custom requests please contact customs@wacighting.com

DESCRIPTION

Full circle. A simple glowing halo completes.

FEATURES

- Up and downlight with recessed silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS


Color Temp:	3000K
Input:	120 VAC, 50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, silicone diffuser

REPLACEMENT PARTS


HDW-SY21-CE - Hardware Pack



FINISHES:

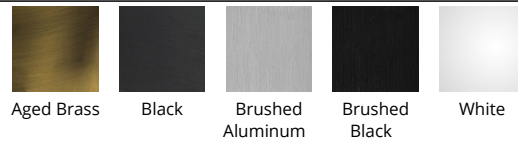

LINE DRAWING:

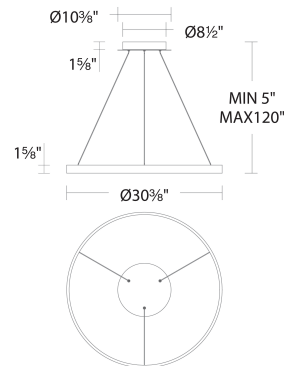

PD-81131

WAC LIGHTING

Sirius

Pendant 3000K

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-81148 48"	3000K	AB Aged Brass AL Brushed Aluminum BK Brushed Black WT White	100 W	5330	2594

Example: **PD-81148-WT**
 For custom requests please contact customs@wacighting.com

DESCRIPTION

Full circle. A simple glowing halo completes.

FEATURES


- Up and downlight with recessed silicone diffuser
- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Quick spin-on canopy design with minimal hardware for easy installation
- Can be mounted on slope ceiling
- Spin-on round canopy with minimal hardware
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, silicone diffuser



FINISHES:

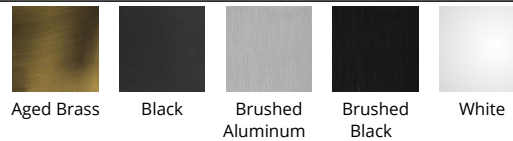

LINE DRAWING:

