

# WAC LIGHTING

## Solorail™

### "T" Connector

Model	Finish
LM-T	BN Brushed Nickel

Example: **LM-T-BN**

#### DESCRIPTION

WAC Lighting low voltage Monorail can be shaped in the field and designed to navigate curves for custom designs. The versatile Solorail™ accommodates hundreds of Quick Connect™ pendants and fixtures. Designed with the thinnest profile in the industry, Solorail™ is engineered for rigorous use in commercial, hospitality and retail applications. Featuring electroplated solid copper bars and precision fabricated components, with a maximum capacity of 25 amperes or 600 watts at 12 volts and 600 watts at 24 volts.

#### FEATURES

- Connects two sections of a monorail in a "T" with electrical continuity
- Dimensions: 5/8" x 1 5/8" x 1 5/8"
- 5 year warranty

#### SPECIFICATIONS

<b>Dimming:</b>	N/T
<b>Finish:</b>	Electroplated Brushed Nickel
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_



#### FINISHES:



Brushed  
Nickel

# WAC LIGHTING

## Solorail™

### Rail Sections

Model	Finish
LM-T8	BN Brushed Nickel

Example: **LM-T8-BN**

#### DESCRIPTION

WAC Lighting low voltage Monorail can be shaped in the field and designed to navigate curves for custom designs. The versatile Solorail™ accommodates hundreds of Quick Connect™ pendants and fixtures. Designed with the thinnest profile in the industry, Solorail™ is engineered for rigorous use in commercial, hospitality and retail applications. Featuring electroplated solid copper bars and precision fabricated components, with a maximum capacity of 25 amperes or 600 watts at 12 volts and 600 watts at 24 volts.


#### FEATURES

- Low voltage versatile single circuit monorail system
- The rail is field cuttable and bendable by hand or with the use of a bending tool
- Two end caps included
- Make sure to order one Quick Connect™ adapter per pendant or fixture ordered (LM-QADP)
- Can be suspended from ceiling with cable or rigid standoffs
- An optional rail bending tool (LM-BM) is available for field bending when precise control and very smooth curves are desired
- 5 year warranty

#### SPECIFICATIONS

<b>Dimming:</b>	N/T
<b>Finish:</b>	Electroplated Brushed Nickel
<b>Operating Temp:</b>	-4°F to 104°F (-20°C to 40°C)
<b>Standards:</b>	UL, cUL, Dry Location Listed

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

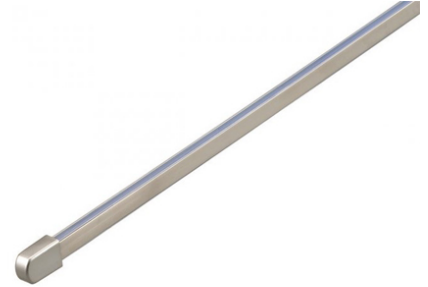

#### FINISHES:



Brushed  
Nickel

#### LINE DRAWING

