

WAC LIGHTING

Stag

Outdoor Wall Sconce

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____



Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W29118 18"	3000K	AL Brushed	16W	1265	789
	3500K	Aluminum		1424	883
	4000K	BK Black		1299	807

Example: **WS-W29118-40-BK**
 For custom requests please contact customs@wacighting.com

DESCRIPTION
 Majestic, keen and sharp. A signature silhouette.

- FEATURES**
- Back lit with indirect illumination
 - 3CCT (3000K/3500K/4000K) selectable switch
 - Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
 - 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
 - ACLED driverless technology
 - 5 year warranty

- SPECIFICATIONS**
- Color Temp:** 3000K,3500K,4000K
Input: 120 VAC,50/60Hz
CRI: 90
Dimming: ELV: 100-10% , TRIAC: 100-10%
Rated Life: 54,000 Hours
Mounting: Can be mounted on wall in all orientations
Standards: ETL, cETL, IP65, Title 24 JA8 Compliant, ADA, Wet Location Listed
Construction: Aluminum body, frosted glass diffuser

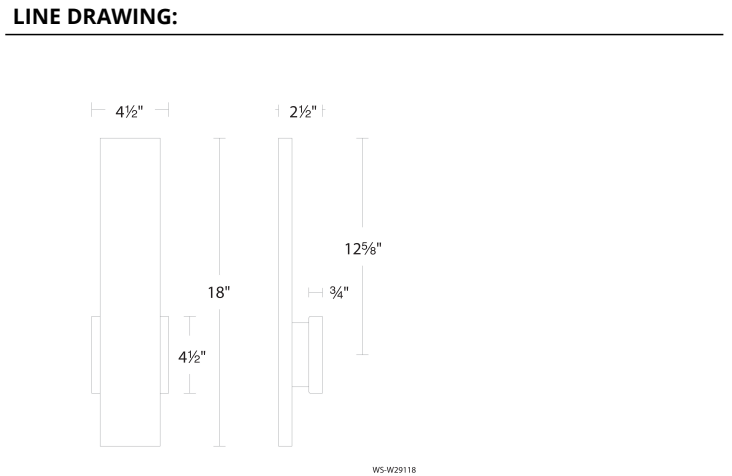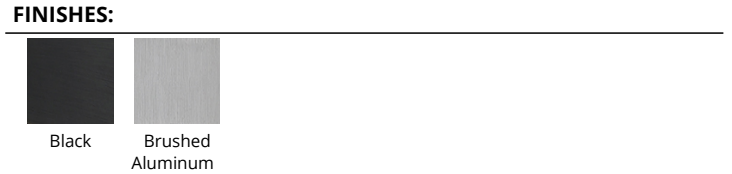

WAC LIGHTING

Stag

Outdoor Wall Sconce

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-W29124 24"	3000K	AL Brushed	24 W	1650	1100
	3500K	Aluminum			
	4000K	BK Black			

Example: **WS-W29124-40-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Majestic, keen and sharp. A signature silhouette.

FEATURES

- Back lit with indirect illumination
- 3CCT (3000K/3500K/4000K) selectable switch
- Built in color temperature adjustability. Switch from 3000K/3500K/4000K.
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	3000K,3500K,4000K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	54,000 Hours
Mounting:	Can be mounted on wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, ADA, Wet Location Listed
Construction	Aluminum body, frosted glass diffuser

REPLACEMENT PARTS


RPL-GLA-29124 - Glass



FINISHES:



LINE DRAWING:

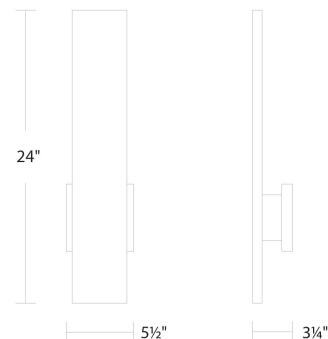

WS-W29124