

WAC LIGHTING

Stealth Framing Projector

Zoomable 12W H/J/L Track Luminaire

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

System Type & Voltage	Model	Color Temp & CRI	Lumens	CBCP	Finish
H 120 VAC J 120 VAC L 120 VAC	1210	927 2700K - 90 930 3000K - 90 935 3500K - 90 940 4000K - 90	20°: 340 / 35°: 330 20°: 350 / 35°: 345 20°: 375 / 35°: 365 20°: 380 / 35°: 375	20°: 3305 / 35°: 1330 20°: 3435 / 35°: 1380 20°: 3645 / 35°: 1465 20°: 3720 / 35°: 1500	BK Black WT White

Example: **H-1210-927-BK**

DESCRIPTION

Stealth framing projector offers precise illumination from a sleek luminaire.

FEATURES

- Precise, high definition zoomable projection
- Stealth armature with 360° horizontal rotation and 90° vertical aiming
- Accepts one glass or metal gobo
- Custom gobo size: Outside Diameter 19.5mm, Thickness ≤ 2.5mm, Image Size ≤ 14.5mm
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS


Construction	Die-cast aluminum
Power:	12W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-1% , TRIAC: 100-1%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Lens:	Optical Lenses
Rated Life:	50,000 Hours
Finish:	Electrostatically Powder Coated Black, White

Operating Temp: -4°F to 104°F (-20°C to 40°C)


Standards: ETL, cETL, Dry Location Listed



FINISHES:



LINE DRAWING

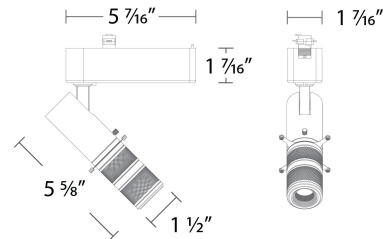


WAC LIGHTING

Stealth Framing Projector

Zoomable 12W H/J/L Track Luminaire

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

INCLUDED DIAGRAMS

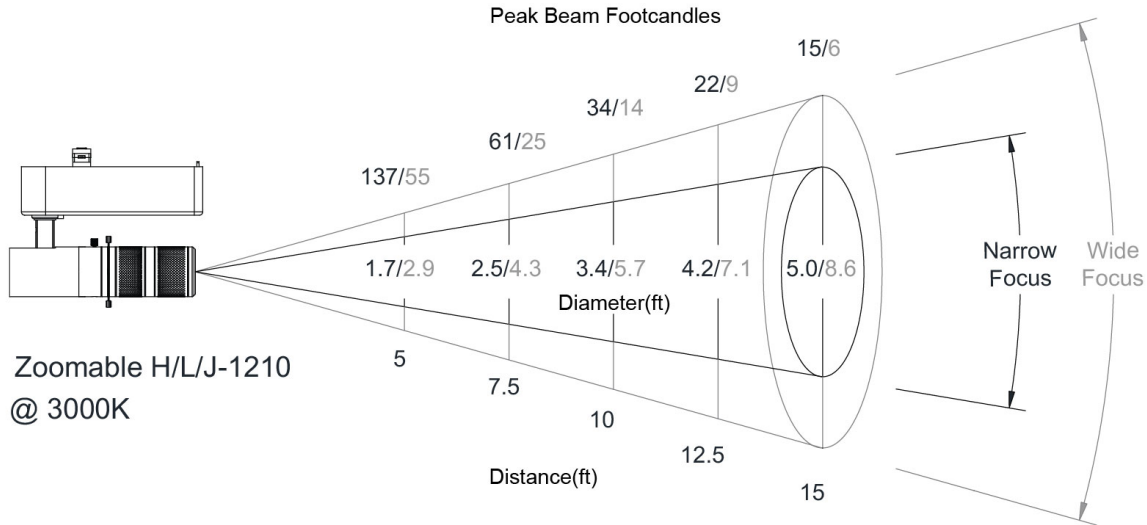

Distance(ft)	5	7.5	10	12.5	15
Maximum square projection using framing shims (ft)	2	3	4	5	6

Above guidelines represent straight-on aiming angle. Results may vary. Mockup in site conditions recommended.