WAC LIGHTING

Summit 2.0 3.5"

AC-LED IC-Rated Complete Kit

Fixture Type:

Catalog Number:

Project:

Location:

System Type	Model	Color Temp & CRI	Lumens	CBCP	Finish
	❍ HR3S-ICR30F ❍ HR3S-ICS30F	2 ❍ 3000K 90	895 910	1680 1587	❍ WT White

Example: **HR3S-ICR30F-WT**

DESCRIPTION

New and improved, the Summit 2.0 is an Energy Star® Rated all-in-one recessed downlight including housing, trim, and LED. The Summit is a Wet and Damp Location rated downlight featuring a round or square trim and IC Rated Airtight New Construction or Non-IC Airtight Remodel Housing options. Whether working on a new project, or remodeling an old one, the Summit 2.0 recessed downlight includes everything you need to keep the shopping experience simple and the performance second to none.

FEATURES

- 3.5" AC-LED integral trim and housing
- Frosted lens for glare control and optimal light distribution
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS

Construction	20 gauge cold rolled steel wiring box
Power:	14.5W
Input:	120 VAC
Dimming:	ELV: 100-10%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Supplied with hanger bars, adjustable from 14 1/2"-25" to accommodate various joist construction and grid sizes.
Cut Out:	4 5/8"
Finish:	Electrostatically Powder Coated: White
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Energy Star 2.0, Airtight, IC

FINISHES:

White

LINE DRAWING

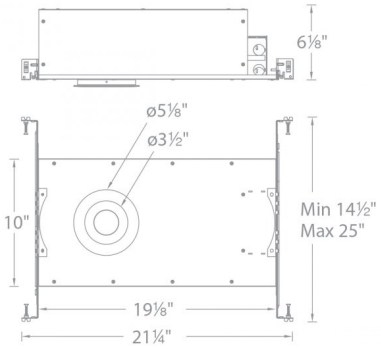

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026