

WAC LIGHTING

Svelte

Wall Sconce

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-7316 16"	2700K	BN Brushed Nickel CH Chrome	24.2W 24.4W	2310	1035 1134 1118

Example: **WS-7316F-BN**

•For 277V special order, add an "F" before the finish: WS-7316F-CH

For custom requests please contact customs@wacighting.com

DESCRIPTION

Water clear glass with mitered edge lines speak to the sophistication of this ultra minimalist, rectilinear luminaire, artfully framed with die-cast metal end caps. Robust illumination as a vanity in hospitality bath applications or as a sconce in hallways. Proprietary LED technology.

FEATURES


- 5mm thick mitered glass with ceramic glaze
- Conversion plate for 4 inch J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10%
Rated Life:	80,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, ADA, Damp Location Listed
Construction	Aluminum hardware with glass diffuser



FINISHES:



LINE DRAWING:

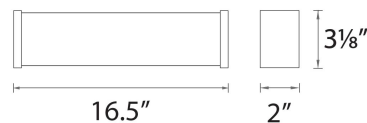

WS-7316

WAC LIGHTING

Svelte

Wall Sconce

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-7322 22"	2700K	BN Brushed Nickel CH Chrome	33.5W 34.2W	2980	1472 1632 1574

Example: **WS-7322F-BN**

•For 277V special order, add an "F" before the finish: WS-7322F-CH

For custom requests please contact customs@wacighting.com

DESCRIPTION

Water clear glass with mitered edge lines speak to the sophistication of this ultra minimalist, rectilinear luminaire, artfully framed with die-cast metal end caps. Robust illumination as a vanity in hospitality bath applications or as a sconce in hallways. Proprietary LED technology.

FEATURES


- 5mm thick mitered glass with ceramic glaze
- Conversion plate for 4 inch J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty



SPECIFICATIONS

Color Temp:	2700K,3000K,3500K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10%
Rated Life:	80,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, ADA, Damp Location Listed
Construction	Aluminum hardware with glass diffuser


FINISHES:



Brushed Nickel

Chrome

LINE DRAWING:



WS-7322

WAC LIGHTING

Svelte

Wall Sconce

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
WS-7334 34"	2700K	BN Brushed Nickel CH Chrome	52.7W 53.5W	4852	2372 2626 2563

Example: **WS-7334F-BN**

•For 277V special order, add an "F" before the finish: WS-7334F-CH

For custom requests please contact customs@wacighting.com

DESCRIPTION

Water clear glass with mitered edge lines speak to the sophistication of this ultra minimalist, rectilinear luminaire, artfully framed with die-cast metal end caps. Robust illumination as a vanity in hospitality bath applications or as a sconce in hallways. Proprietary LED technology.

FEATURES

- 5mm thick mitered glass with ceramic glaze
- Conversion plate for 4 inch J box included
- Trimless spackle cover available for 4" square junction box recessed in drywall thicknesses of 1/2", 5/8", 1", and 1-1/4"; accessory not included and can be ordered separately (model# CP-TL-WT)
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- 0-10V dimming option (LDS065M010AFE-LO1) available (special order), unit dimensions: 3.4" x 1.2" x 0.5"
- ACLED driverless technology
- 5 year warranty

SPECIFICATIONS


Color Temp:	2700K,3000K,3500K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10%
Rated Life:	80,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, ADA, Damp Location Listed
Construction	Aluminum hardware with glass diffuser

REPLACEMENT PARTS

RPL-GLA-7334 - Glass for WS-7334




FINISHES:



Brushed Nickel

Chrome

LINE DRAWING:



WS-7334