Fixture Type:

Catalog Number:

Project:

Location:

WAC LIGHTING

Tesla Pro

Remodel Airtight Housing

Model & Product

❍ HR-2LED-R09D-A Tesla 2in LED Remodel Housing

Example: **HR-2LED-R09D-A**

DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

FEATURES

- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction	20 gauge cold rolled steel
Power:	14.5W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-0%
Mounting:	Heavy gauge retention clips secures housing firmly to ceiling
Cut Out:	3 7/8"
Finish:	Aluminum
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Airtight, Non IC

FINISHES:

Aluminum

LINE DRAWING

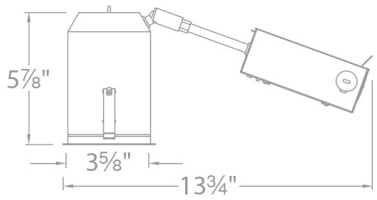

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. September 2026

WAC LIGHTING

Tesla Pro 2"

Trim High Brightness Round

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ HR2LD-ET109P	❍ F 55°	❍ 827 2700K - 85	935	972	❍ BN Brushed Nickel
		❍ 830 3000K - 85	975	994.6	❍ CB Copper Bronze
		❍ 835 3500K - 85	1055	1090	❍ WT White
		❍ 840 4000K - 85	1075	1106	
		❍ 927 2700K - 90	760	777	
		❍ 930 3000K - 90	860	877.7	
	❍ N 30°	❍ 827 2700K - 85	955	1765	
		❍ 830 3000K - 85	990	1807	
		❍ 835 3500K - 85	1080	2015	
		❍ 840 4000K - 85	1090	2035	
		❍ 927 2700K - 90	775	1436	
		❍ 930 3000K - 90	880	1619	
	❍ S 15°	❍ 827 2700K - 85	725	3252	
		❍ 830 3000K - 85	780	3485	
		❍ 835 3500K - 85	785	3526	
		❍ 840 4000K - 85	810	3619	
		❍ 927 2700K - 90	610	2732	
		❍ 930 3000K - 90	550	3526	

Example: **HR2LD-ET109PF827BN**

DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

FEATURES

• 2" aperture
• 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum construction
Power:	14.5W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-0%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated: White, Electroplated Copper Bronze, Electroplated Brushed Nickel
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant

FINISHES:

Brushed Nickel | Copper Bronze | White

LINE DRAWING



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. September 2026

WAC LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

Tesla Pro 2"

Open Reflector Round

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ HR2LEDT109P	❍ F 40°	❍ 827 2700K - 85	720	1278	❍ BN Brushed Nickel
		❍ 830 3000K - 85	760	1330	❍ CB Copper Bronze
		❍ 835 3500K - 85	830	1476	❍ WT White
		❍ 840 4000K - 85	860	1519	
		❍ 927 2700K - 90	595	1037	
		❍ 930 3000K - 90	675	1158	
	❍ N 27°	❍ 827 2700K - 85	750	2077	
		❍ 830 3000K - 85	810	2250	
		❍ 835 3500K - 85	865	2378	
		❍ 840 4000K - 85	890	2457	
		❍ 927 2700K - 90	630	1656	
		❍ 930 3000K - 90	700	1871	
	❍ S 15°	❍ 827 2700K - 85	590	3260	
		❍ 830 3000K - 85	635	3493	
		❍ 835 3500K - 85	640	3534	
		❍ 840 4000K - 85	655	3627	
		❍ 927 2700K - 90	495	2738	
		❍ 930 3000K - 90	450	2479	

Example: **HR2LEDT109PF827BN**

DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.



FEATURES

- 2" aperture
- 30° visual cutoff angle for glare control
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum construction
Power:	14.5W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-0%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated: White, Electroplated Copper Bronze, Electroplated Brushed Nickel
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Title 24 JA8 Compliant

FINISHES:

Brushed Nickel

Copper Bronze

White

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. September 2026

WAC LIGHTING

Tesla Pro 2"

Open Reflector Round

Fixture Type:

Catalog Number:

Project:

Location:

LINE DRAWING:

WAC LIGHTING

Tesla Pro 2"

Shower Trim Round

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ HR2LEDT209P	❍ N 27°	❍ 827 2700K - 85	730	1851	❍ BN Brushed Nickel
		❍ 830 3000K - 85	765	1915	❍ CB Copper Bronze
		❍ 835 3500K - 85	820	2047	❍ WT White
		❍ 840 4000K - 85	850	2119	
		❍ 927 2700K - 90	600	1510	
		❍ 930 3000K - 90	685	1697	

Example: **HR2LEDT209PN827BN**

DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.



FEATURES

- 2” aperture
- 30° visual cutoff angle for glare control
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum construction
Power:	14.5W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-0%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated: White, Electroplated Copper Bronze, Electroplated Brushed Nickel
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant

FINISHES:

Brushed Nickel | Copper Bronze | White

LINE DRAWING



WAC LIGHTING

Tesla Pro 2"

Open Reflector Square

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ HR2LEDT709P	❍ F 45°	❍ 827 2700K - 85	795	1073	❍ BN Brushed Nickel
		❍ 830 3000K - 85	825	1089	❍ CB Copper Bronze
		❍ 835 3500K - 85	880	1189	❍ WT White
		❍ 840 4000K - 85	900	1213	
		❍ 927 2700K - 90	620	847.8	
		❍ 930 3000K - 90	725	989.1	
	❍ N 30°	❍ 827 2700K - 85	810	1844	
		❍ 830 3000K - 85	845	1919	
		❍ 835 3500K - 85	910	2079	
		❍ 840 4000K - 85	935	2163	
		❍ 927 2700K - 90	660	1510	
		❍ 930 3000K - 90	755	1721	
	❍ S 15°	❍ 827 2700K - 85	620	3182	
		❍ 830 3000K - 85	665	3411	
		❍ 835 3500K - 85	675	3450	
		❍ 840 4000K - 85	695	3541	
		❍ 927 2700K - 90	525	2674	
		❍ 930 3000K - 90	475	2420	

Example: **HR2LEDT709PF827BN**

DESCRIPTION

Tesla series is at the pinnacle of where lighting innovation meets energy-efficiency. A high-performance serviceable integrated LED with a state of the art light engine delivers incredible maintenance-free optics and performance ideal for high-end residential and commercial applications. With a wide variety of solid die-cast trims in a multitude of handsome plated or powder coated finishes, the Tesla collection is sure to enhance style and appeal in any space. Tesla PRO provides up to 60% higher lumen output over the standard Tesla collection for when more lighting is required such as in tall ceiling applications. The trim and LED engine are manufactured as a single unit with endless amounts of specifications including shape and finish of trim, adjustability, color temperature, and beam distribution to create the perfect combinations of form, factor, and function.

FEATURES

- 2” aperture
- 30° visual cutoff angle for glare control
- Adjustable fixtures are ideal for sloped ceiling applications
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast aluminum construction
Power:	14.5W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , 0-10V: 100-0%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips support trim firmly
Finish:	Electrostatically Powder Coated: White, Electroplated Copper Bronze, Electroplated Brushed Nickel
Ceiling Thickness:	1/2" - 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Title 24 JA8 Compliant

FINISHES:

Brushed Nickel

Copper Bronze

White

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. September 2026

WAC LIGHTING

Tesla Pro 2"

Open Reflector Square

Fixture Type:

Catalog Number:

Project:

Location:

LINE DRAWING:



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. September 2026