

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

VENTRIX

Volo Pendants

Model	Size	Watt	Color Temp & CRI	Delivered Lumens	Finish
S2PD05	1	18W	927 2700K - 90	1410	AL Brushed Aluminum BK Black
		18W	930 3000K - 90	1480	
	1	18W	935 3500K - 90	1560	
		18W	940 4000K - 90	1590	
	1	25W	927 2700K - 90	1840	
		25W	930 3000K - 90	1940	
	1	25W	935 3500K - 90	2040	
		25W	940 4000K - 90	2070	
	2				
	2				
	2				
	2				

Example: **S2PD05-1-927AL**

DESCRIPTION

Sleek, linear and minimalist. An extruded aluminum body enables superior light output from evenly diffused LEDs for generous task illumination. Volo balances form and function, used individually or in groups. Field adjustable suspension cables. Dims beautifully.

FEATURES

- Ultra thin pendant for the discerning minimalist
- Frosted diffuser provides even illumination
- Suspension cables may be field shortened
- Driver concealed within the VENTRIX adapter
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- 5 year warranty

SPECIFICATIONS

Construction	Aluminum hardware with polycarbonate diffuser
Power:	18W, 25W
Input:	48 VDC
Dimming:	ELV: 100-0.1% , 0-10V: 100-0.1% , TRIAC: 100-0.1%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Lens:	Polycarbonate Diffuser
Rated Life:	50,000 Hours
Mounting:	Installs magnetically and mechanically into VENTRIX system
Finish:	Electrostatically Powder Coated: Black, Anodized Brushed Aluminum
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed, Title 24 JA8 Compliant



FINISHES:




VENTRIX

Volo Pendants

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

LINE DRAWING:

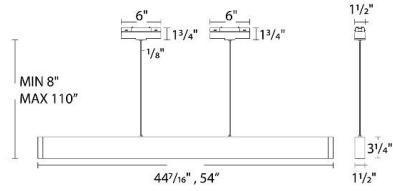


SZPD05-1, SZPD05-2

VENTRIX

Volo Pendants

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

ACCESSORIES

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	S2PD-HOOK-WT S2PD-HOOK-BK	VENTRIX VENTRIX	White Black