

WAC LIGHTING

VENTRIX Tunable White

Stealth Downlights

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & size	Power	Watt	Beam	Color Temp & CRI	Delivered Lumens	CBCP	Finish
S2SD	1	10W	N 25° F 50°	TWA 1800K-4000K - 90	560 610	1845 910	BK Black CH Chrome GL Gold HZ Haze WT White

Example: **S2SD-1-FTWABK**

Lumens and CBCP are reference values for 3000K Color Temperature

Lumens and CBCP Multiplier						
Color Temperature	1800K	2200K	2700K	3000K	3500K	4000K
Multiplier	0.72	0.82	0.95	1.00	1.07	1.14




DESCRIPTION

Ventrix redefines flexibility — offering both Dim to Warm and Tunable White options in one innovative fixture. Installed anywhere along the channel or side by side in pairs, Stealth Downlights provide task illumination with virtually no glare. Finish options complement other elements in your VENTRIX array, and field changeable optics and trims add another level of design customization.

FEATURES

- Low glare trim with 30° shielding angle
- Interchangeable trim available in 5 finishes
- May be installed side by side or at end of VENTRIX channel
- Stealth Downlight may be installed in corners or at the end of channel.
- To enable access to VENTRIX element releasing tabs, maintain at least 3" of free channel space
- Driver concealed within the fixture
- 5 year warranty

FINISHES:

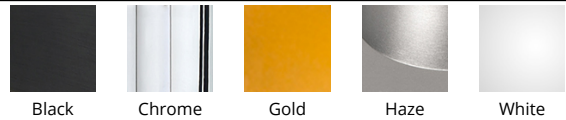

SPECIFICATIONS

Construction	Die-cast aluminum with injection molded low glare trim
Power:	10W
Input:	48 VDC
Dimming:	ELV: 100-0.1% , 0-10V: 100-0.1% , TRIAC: 100-0.1% , DMX: 100-0.1%
Light Source:	Integrated LED, 3 Step Mac Adam Ellipse
Rated Life:	50,000 Hours
Mounting:	Installs magnetically and mechanically into VENTRIX system, Can be mounted on ceiling or wall vertically or horizontally
Finish:	Injection Molded Polycarbonate Black, Chrome, Gold, Haze, White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed, Title 24 JA8 Compliant

LINE DRAWING

