

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69403L1 24" - 3 Lights	2700K/3000K/3500K/4000K - 90	15 W	401	BK Black

Example: **PD-69403L1-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




FINISHES:



Black

LINE DRAWING:

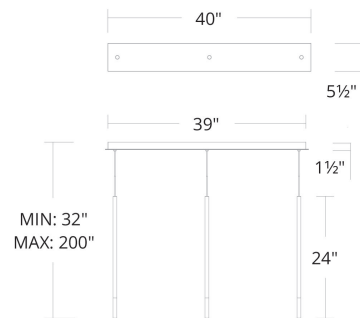

PD-69403L1

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69403L2 32" - 3 Lights	2700K/3000K/3500K/4000K - 90	15 W	401	BK Black

Example: **PD-69403L2-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

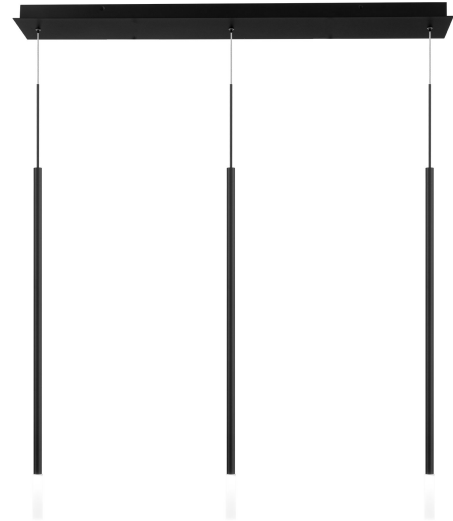


FINISHES:



Black

LINE DRAWING:

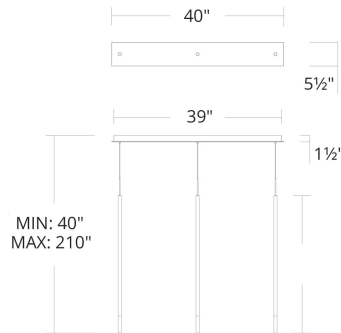

PD-69403L2

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69405L1 24" - 5 Lights	2700K/3000K/3500K/4000K - 90	20 W	536	BK Black

Example: **PD-69405L1-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




FINISHES:



Black

LINE DRAWING:

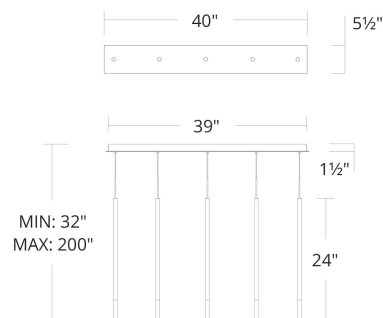

PD-69405L1

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69405L2 32" - 5 Lights	2700K/3000K/3500K/4000K - 90	20 W	536	BK Black

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Example: **PD-69405L2-BK**

For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

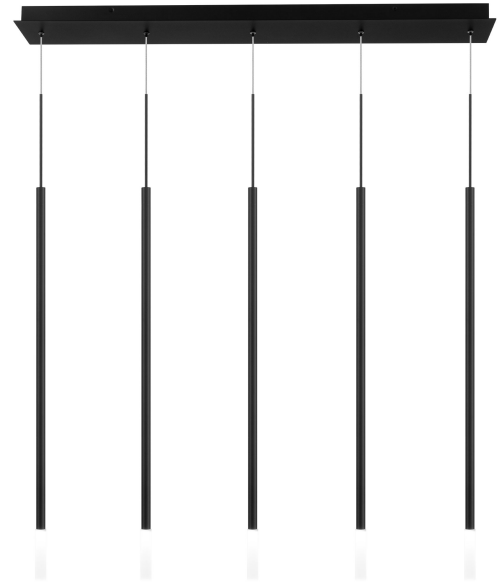


FINISHES:



Black

LINE DRAWING:

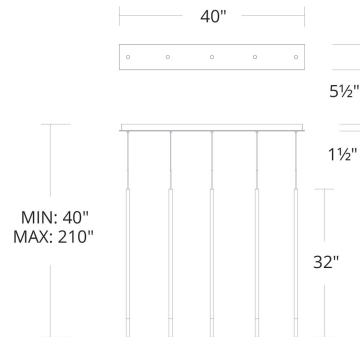

PD-69405L2

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Fixture Type: _____
 Catalog Number: _____
 Project: _____
 Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69414L 32" - 14 Lights	2700K/3000K/3500K/4000K - 90	57 W	1607	BK Black

Example: **PD-69414L-BK**
 For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES

- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser




FINISHES:



Black

LINE DRAWING:

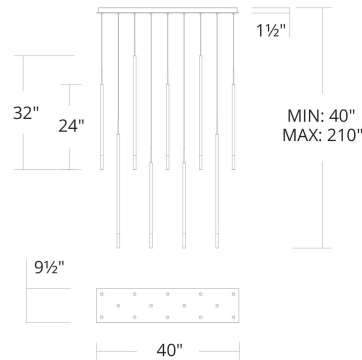

WAC LIGHTING

Viggo

Linear Multi Light 4CCT

Fixture Type: _____
Catalog Number: _____
Project: _____
Location: _____

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
PD-69423L 32" - 23 Lights	2700K/3000K/3500K/4000K - 90	95 W	2543	BK Black

Example: **PD-69423L-BK**
For custom requests please contact customs@wacighting.com

DESCRIPTION

Wisp of light. This sleek and refined pendant is tipped with an acrylic diffuser, casting diffused illumination while emphasizing its minimalistic style.

FEATURES


- Low profile, adjustable powered aircraft cables for an ultra-clean look
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K/4000K
- Driver concealed within the canopy

SPECIFICATIONS

Color Temp:	2700K/3000K/3500K/4000K
Input:	120-277V,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , 0-10V: 100-5% , TRIAC: 100-5%
Rated Life:	50,000 Hours
Standards:	ETL, cETL, Damp Location Listed
Construction	Aluminum body with etched acrylic diffuser

REPLACEMENT PARTS

RPL-GLA-69424 - Acrylic Diffuser

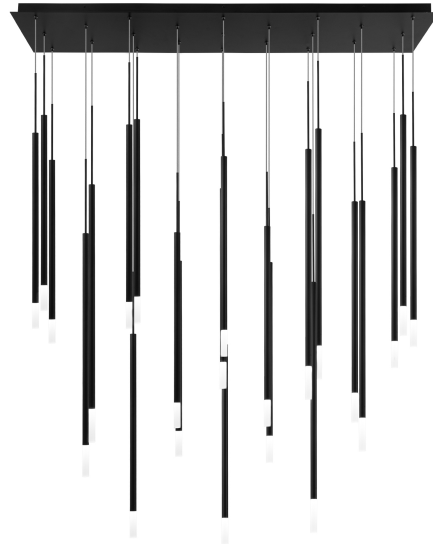

FINISHES:



Black

LINE DRAWING:

