

INSTALLATION INSTRUCTIONS

Surface Mount Indicator Light

2501 / 2511 / 2521 / 2531 / 2541 / 2551 / 2571 / 2591

WAC
LANDSCAPE LIGHTING

WARNING

IMPORTANT: NEVER attempt to do any work without shutting off the electricity.

1. Read all instructions before installing.
2. System is intended for installation by a qualified electrician in accordance with the National Electrical Code and local regulations.
3. Place the wall switch in the "OFF" position.
4. Go to the main fuse box, or circuit breaker. Unscrew the fuse(s) or switch "OFF" the circuit breaker switch(es) that control the power to the space that you are working on.
5. Risk of electric shock. Install all luminaires 10 feet (3.05m) or more from a pool, spa or fountain.
6. Listed wire nuts suitable for wet location.
7. The unit low voltage cable shall:
 - a. be protected by routing in close proximity to the luminaire or fitting, or next to a building structure such as a house or deck;
 - b. not be buried except for a maximum 6 inches (15.2 cm) in order to connect to the main low voltage cable;
 - c. have the length cut off so that it is connected to a connector within 6 inches (15.2 cm) from a building structure, a luminaire, or fitting.

CAUTION

All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken. Failure to follow this instruction may invalidate the UL listing of this fixture.

AVERTISSEMENT

IMPORTANT: Coupez l'électricité avant TOUTE manipulation.

- Lisez toutes les instructions avant d'installer.
- Système est destiné à être installé par un électricien qualifié en conformité avec le code national de l'électricité et les règlements locaux.
- Placez l'interrupteur mural en position d'arrêt (« OFF »).
- Toujours mettre le fusible ou le disjoncteur en position arrêt dans la pièce ou des travaux électriques sont prévus

MISE EN GARDE

- Toutes les pièces doivent être utilisées tel qu'il est indiqué dans ces instructions. Ne remplacez pas les pièces, n'en laissez pas de côté et ne les utilisez pas si elles sont usées ou brisées. Le non-respect de ces instructions peut annuler l'homologation UL du luminaire.

ADVERTENCIA


IMPORTANTE: NUNCA intente hacer trabajos sin desconectar el suministro eléctrico.

- Lea y comprenda todas las instrucciones e ilustraciones por completo antes de proceder con el ensamblaje e instalación de esta lámpara.
- Sistema está diseñado para ser instalado por un electricista calificado, de acuerdo con el código eléctrico nacional y las normas locales.
- Coloque el interruptor de la pared en la posición "OFF" (APAGADO).
- Diríjase a la caja de fusibles o a la caja del interruptor de circuito principal en su hogar. Coloque el interruptor de alimentación principal en la posición "OFF" (APAGADO).

PRECAUCIÓN

- Todas las piezas deben usarse como lo indican estas instrucciones. No reemplace las piezas, noomita piezas durante la instalación ni utilice piezas gastadas o rotas. El incumplimiento de esta indicación podría invalidar la calificación UL esta lámpara.

THE INSTRUCTIONS APPLY TO THE MODEL(S) BELOW:

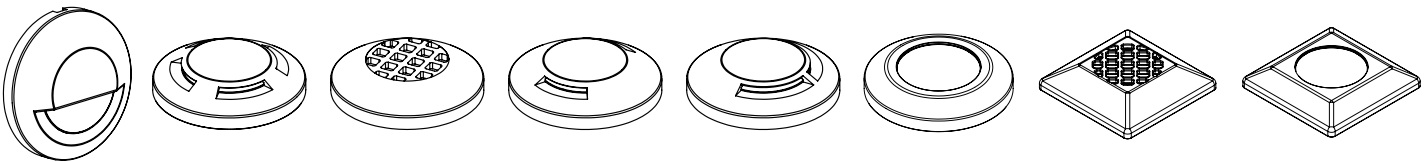

2541

2501

2511

2571

2591

2521

2531

2551

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761

INSTALLATION INSTRUCTIONS

Surface Mount Indicator Light


2501 / 2511 / 2521 / 2531 / 2541 / 2551 / 2571 / 2591

WAC
LANDSCAPE LIGHTING


INSTALLATION ACCESSORIES



Wire Nut
Qty: 2 pcs
7EAC112201P3




Hex Key
Qty: 1 pcs
7MPE155003



Mounting Hardware
Qty: 2 pcs/each

INSTALLATION (CONCRETE/WOOD/WALL):

1. Disassemble the fixture mounting base bracket from the fixture assembly.
2. Take off the fixture cap from the fixture body by unscrewing the locking set screw.
3. Mark the fixture mounting location on the concrete/wood floor using the fixture body.
4. Drill a through hole to allow fixture lead wire to exit the concrete/wood floor or use the lead wire side exit. Drill anchor holes for plastic anchors (for concrete installation).
5. Use #8 tapping screws (and plastic anchors) to mount the fixture body.
6. Mount the fixture cap back to the fixture body by snapping it into the slot.
7. Lock the fixture cap by tightening the locking set screw on the side.
8. For square caps, use the alignment arrows to align the cap to the path, see figure below.

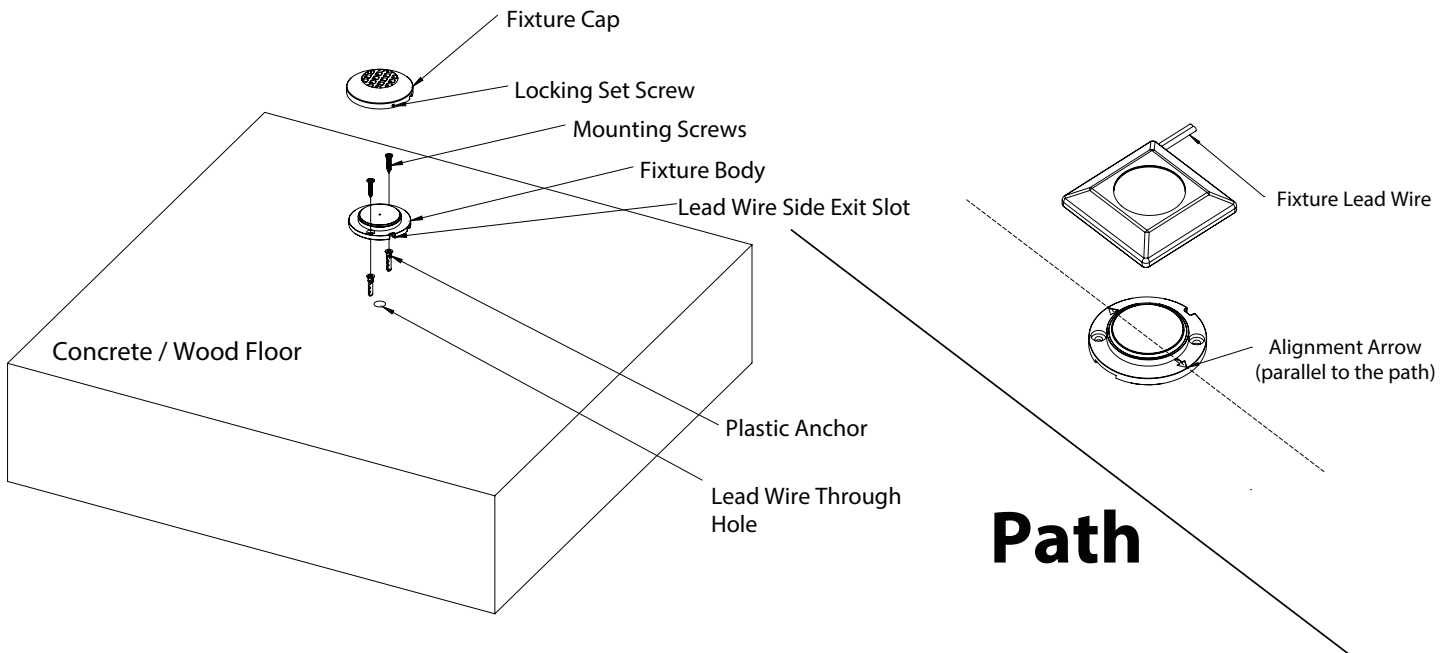

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761

本页仅用于版本控制，请勿印刷！

THIS PAGE IS FOR VERSION CONTROL ONLY, PLEASE DO NOT PRINT !

序号 REV NO.	变更说明 REVISION NTOE	变更人 CHANGED BY	变更日期 REV DATE
1	更新 LOGO	程刚	07/18/2022
2	更新 LOGO	余耀庭	09/30/2022
3	增加新型号 added new model	刘先志	08/26/2024
4			
5			

料号：7DDB001039

PART NO.

规格：80 克进口书写纸 A4，双面印刷，短边对折两下

Specifications: 80g imported writing paper A4, double-sided printing, short side folded twice

图号：2591-09 D

DRAWING NO.

设计：刘先志 10/18/2021

DESIGNED BY

审核：

CHECKED BY

标准化：

STD BY

批准：

APPROVED BY