

OCULARC – model: 3020W-CS

Monopoint Luminaire




Fixture Type:

Catalog Number:

Project: _____

Location: _____

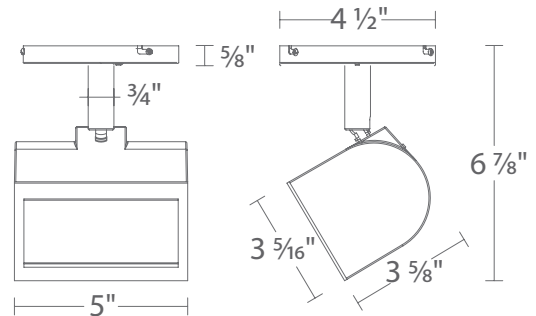

PRODUCT DESCRIPTION

Ideal for residential spaces and lower-mounted commercial installations, the OCULARC 3020W-CS provides an asymmetrical optical distribution suited to wall wash applications. Constructed from die-cast aluminum, the fixtures offer a 350-degree horizontal rotation and 90-degree vertical tilt for precision aiming. Engineered with integral 5CCT selectable LEDs and driver, it produces a high output asymmetric distribution in 90CRI. Available in monopoint or H, J/J2, and L track configurations.

FEATURES

- Install 3 to 5 feet from wall and 3 to 5 feet on center for optimal effect
- Discrete, toolless integrated 5CCT switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Asymmetrical beam distribution for even wall illumination
- Economical performance luminaire with integral LED and driver
- 350° horizontal rotation and 90° vertical aiming
- 5 year warranty

ORDER NUMBER

System	Model	Color Temp	CRI	Max Lumens	Finish
MO Monopoint	3020W	2700K	90	1150	BK Black WT White
		3000K			
		3500K			
		4000K			
		5000K			

MO-3020W-__-__

Example: MO-3020W-CS-BK

SPECIFICATIONS

- Construction:** Die-cast aluminum
- Input Power:** 22W at 120 - 277VAC, 50/60Hz
- Power Factor:** 0.93 at 120VAC, 0.91 at 277VAC
- THD(A):** < 15% Total Harmonic Distortion (Current)
- Light Source:** High output 3 Step Mac Adam Ellipse SMD LEDs, 90+ CRI
Rated Life of 50,000 hours at L70
- Dimming:** Electronic Low Voltage (ELV) or TRIAC: 100 - 10%
Reference dimming report for compatibility
- Standards:** ETL & cETL Damp Location Listed,
Title 24 JA8 Compliant
- Finish:** Electrostatically powder coated Black and White
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

EXTENSIONS Custom order as a complete unit. Ceiling mount only.

Extension	Color Temp	CRI	Finish
X6 6"	MO3020W	CS	BK WT
X12 12"			
X18 18"			
X24 24"			
X36 36"			
X48 48"			

Example: X12-MO3020WCSWT

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave


Ontario, CA 91761

OCULARC – model: 3020W-CS

Monopoint Luminaire



LAYOUT GUIDE

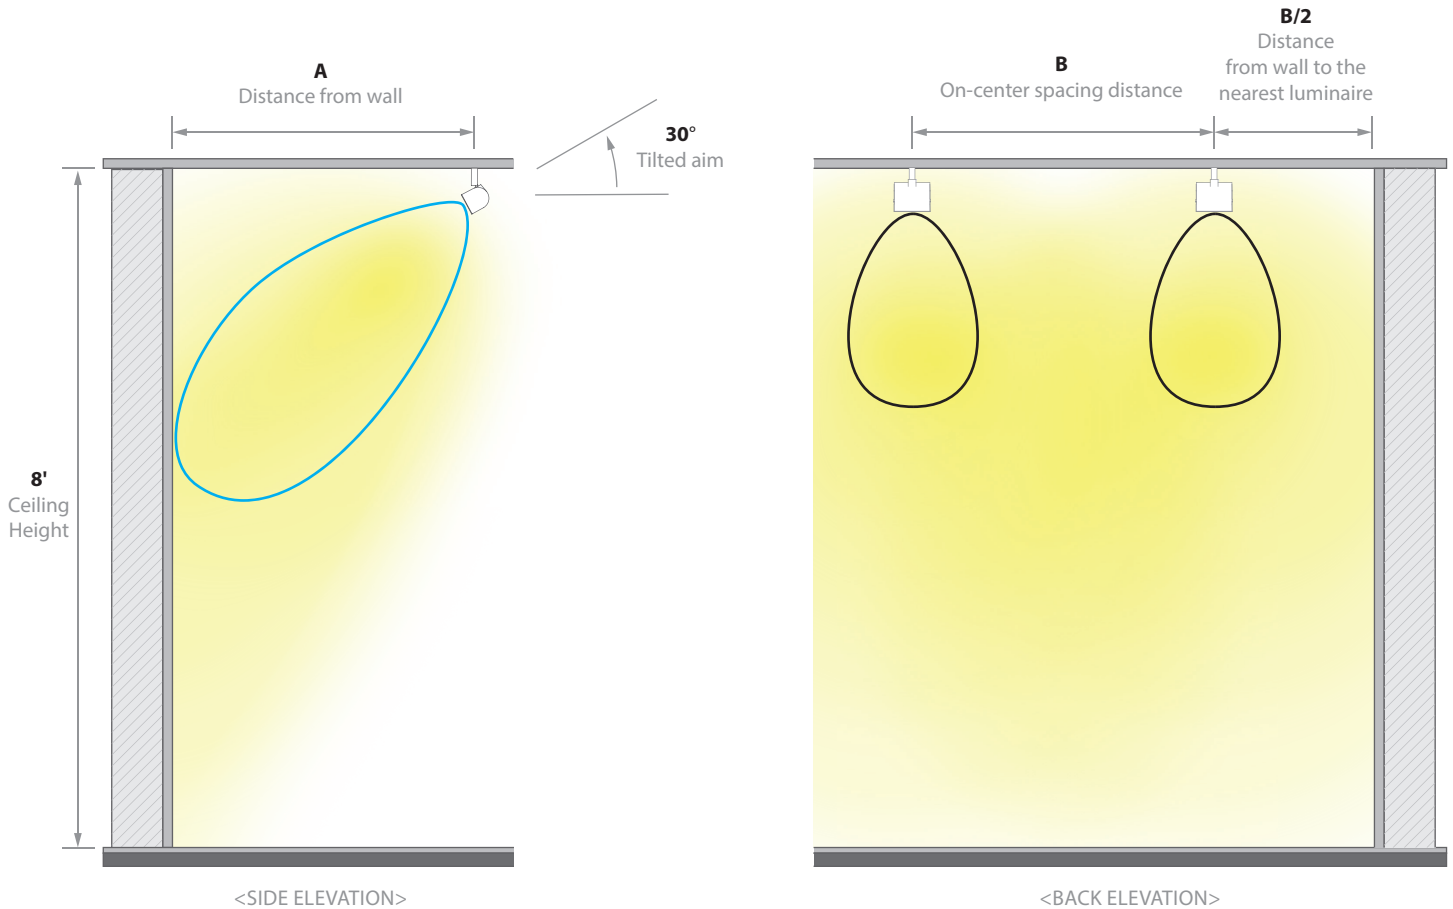


AVERAGE WALL ILLUMINANCE (5000K fixtures)

		B On-center spacing distance	
		3 feet	5 feet
A Distance from wall	3 feet	33 fc	21 fc
	5 feet	25 fc	16 fc

PHOTOMETRY

Shown when fixture is aimed towards the ground (nadir)

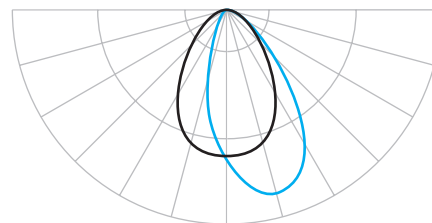

80%W ceiling, 50% wall, 20% floor reflectance levels used in study.
Change to reflectance levels will affect results.

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761