


ECLIPSE LED PATH LIGHT

6031

WAC

LANDSCAPE LIGHTING

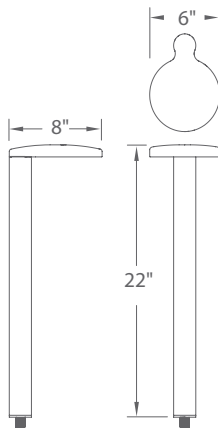

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION


Sturdy side mount design works well in applications where directional illumination is desired

SPECIFICATIONS

Input: 9-15VAC (Transformer is required)
Power: 2.9W / 4.7VA (Use VA value for sizing the transformer and calculate voltage drop.)
Brightness: 125 lm
CRI: 90+
Rated Life: 60,000 hours

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Translucent lens provides uniform light distribution
- Solid diecast corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential: 8 to 10ft; Commercial: 5 to 7ft
- 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & cUL 1838 Listed
- **Guardian mount accessory included in Bronze on Brass;**
Mounting stake accessory included in Bronze and Black on Aluminum

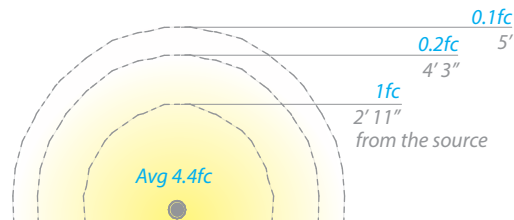

ORDERING NUMBER

		Color Temp	Finish
6031	Eclipse	27 2700K Warm White	BBR Bronze on Brass
		30 3000K Pure White	BZ Bronze on Aluminum BK Black on Aluminum

6031-___BZ

Example: 6031-30BZ

wacighting.com Phone (800) 526.2588 Fax (800) 526.2585	Headquarters, East Manufacturing Facility 44 Harbor Park Drive Port Washington, NY 11050	South East Manufacturing Facility 1600 Distribution Ct Lithia Springs, GA 30122	Central Manufacturing Facility 1700 South J Elmer Freeway, Ste 100 Cedar Hill, TX 75104	West Manufacturing Facility 1750 S Archibald Ave Ontario, CA 91761
--	---	--	--	---

ECLIPSE LED PATH LIGHT

6031

WAC

LANDSCAPE LIGHTING

Surface Mount Flange/Stake



Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box

5000-SCP-BZ
Bronze on Aluminum

Additional Mounting Stake



9000-ST9-BK
Durable PVC stake



Guardian Mount

Heavy duty stainless steel spike to position fixture.
Formed from a single piece of metal

9000-SP9-BZ
Stainless Steel

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories

9075-TRN-SS
75W Max

9150-TRN-SS
150W Max

9300-TRN-SS
300W Max

9600-TRN-SS
600W Max



TESTED MAGNETIC LOW VOLTAGE (MLV) DIMMERS

Luminaire	Dimmer					
	Manufacturer	Family	Model	Power Rating	Range*	Note
6031	Lutron	Diva	DVLV-600	600W	33% - 100%	Output maxes at 50% dimming level
		Skylark	SLV-600P	600W	28% - 100%	Output maxes at 50% dimming level
		Skylark	S-10P	1000W		Not recommended

*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761