


CANOPY 6" LED AREA LIGHT  
6053

WAC  
LANDSCAPE LIGHTING

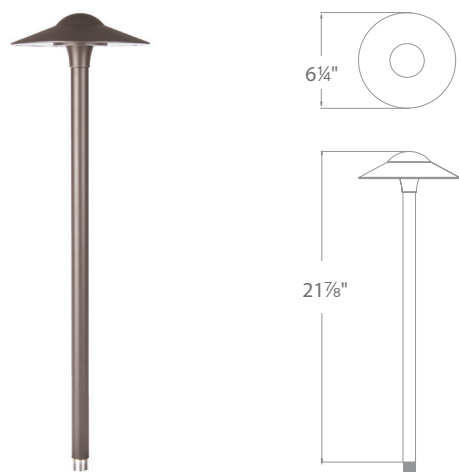

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


Sturdy side mount design works well in applications where directional illumination is desired

FEATURES

- IP66 rated, Protected against powerful water jets
- Factory sealed water tight fixtures
- Solid brass or corrosion resistant aluminum alloy
- Recommended spacing for installation: Residential: 7 to 9ft; Commercial: 5 to 7ft
- Mounting stake, 6 foot lead wire, and direct burial gel filled wire nuts are included
- Maintains constant lumen output against voltage drop
- UL & cUL 1838 Listed

SPECIFICATIONS

**Input:** 9-15VAC (Transformer is required)  
**Power:** 6.5W / 9.5VA (Use VA value for sizing the transformer and calculate voltage drop.)  
**Brightness:** Up to 225 lm  
**CRI:** 90+  
**Rated Life:** 60,000 hours

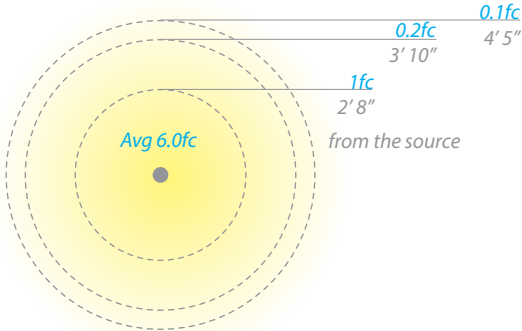

ORDERING NUMBER

Color Temp		Finish
6053	Canopy	27 2700K Warm White
		30 3000K Pure White
		BBR Bronze on Brass BZ Bronze on Aluminum BK Black on Aluminum


6053-\_\_BK

Example: 6053-30BK

CANOPY 6" LED AREA LIGHT  
6053


WAC  
LANDSCAPE LIGHTING

Surface Mount Flange/Stake

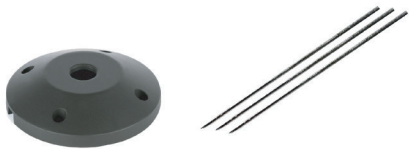

*Includes three 7 inch threaded stainless steel stabilizing pins for ground mounting or surface mounts with four screws or over a junction box*

**5000-SCP-BZ**  
*Bronze on Aluminum*



Guardian Mount

*Heavy duty stainless steel spike to position fixture.  
Formed from a single piece of metal*

**9000-SP9-BZ**  
*Stainless Steel*

Additional  
Mounting Stake



**9000-ST9-BZ**  
*Durable PVC stake*

Magnetic Transformers

*Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed  
See transformer spec sheet for details and its accessories*

**9075-TRN-SS**  
*75W Max*

**9150-TRN-SS**  
*150W Max*

**9300-TRN-SS**  
*300W Max*

**9600-TRN-SS**  
*600W Max*

