

OCULARC – model: 7011/3-CS

3 Light H Track Luminaire Kit

WAC





Fixture Type:

Catalog Number:

Project: _____

Location: _____

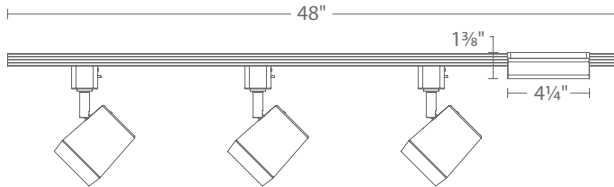

PRODUCT DESCRIPTION

Ideal for residential spaces and lower-mounted commercial installations, the OCULARC 7011-CS combines a high efficacy 5-CCT selectable COB LED with easy-to-use films for three separate beam spreads, along with an adjustable base to accommodate a variety of user preferences. With the driver and thermal/optical management encased in the die-cast housing, this compact luminaire offers a clean, efficient, versatile design that works with almost any décor.

FEATURES

- **3 beam angle options included:**
 - 60° beam film pre-installed, interchangeable 30° film supplied, remove film for 17° spot beam
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- 350° horizontal and 90° vertical aiming
- 5 year warranty

Kit Includes

3x H-7011-CS	<i>White or Black Ocularc LED Luminaires</i>
1x HT4	<i>White or Black 4ft H-Track (Includes two End Caps)</i>
1x HFC	<i>White or Black Floating Canopy Connector</i>

System	Model	Beam	Max Lumens*	Max CBCP*	Color Temp	CRI	Finish
H H Track	7011/3	17°	1025	3935	CS 2700K/3000K/3500K/4000K/5000K	90	BK Black WT White
		30°	955	1520			
		60°	920	670			

* Data represented per fixture

H-7011/3-CS-_____

Example: **H-7011/3-CS-WT**

SPECIFICATIONS

Construction: Die-cast aluminum with baffled front cover for glare control

Input Power: 3x 11W at 120VAC, 50/60Hz

Power Factor: 0.98*

THD(A): < 15% Total Harmonic Distortion (Current)*

Light Source: High output 3 Step Mac Adam Ellipse COB, 90+ CRI
Rated Life of 50,000 hours at L70

Dimming: Electronic Low Voltage (ELV) or TRIAC: 100 - 10%
Reference dimming report for compatibility.

Standards: ETL & cETL Dry Location Listed,
Title 24 JA8 Compliant

Finish: Electrostatically powder coated Black and White

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

* Data represented per fixture

REPLACEMENT OPTICS

17°	Spot TIR Lens	TIR-HER2-OD50-S-W
30°	Narrow Flood Film	FILM-16-N
60°	Flood Film	FILM-16-F

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761