

ZORON C4RL

Round Trimless Ceiling Mount

WAC®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The Zoron series combines sleek aesthetics with exceptional performance. Compact and stylish enough for residential applications, yet powerful enough to be used commercially. With built-in color temperature selection and the option to be used either indoors or out, Zoron adapts to any setting. Regressed trims and specialized TIR optics provide both aesthetic appeal and glare control, making Zoron the perfect blend of form and function.


FEATURES

- Die-cast aluminum construction
- 5-CCT Switchable between 2700K and 5000K
- Suitable for indoor or outdoor use
- Low glare regressed trim with 25°+ shielding angle
- Driver concealed within the fixture


SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	ELV, TRIAC, 0-10V: 100-5%
Light Source:	Integrated LED
Finish:	Electrostatically powder coated: White, Black Injection molded polycarbonate: Black, Chrome, Gold, Haze, White
Standards:	UL, cUL, IP65, Title 24 JA8 Compliant, Wet Location Listed
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

LINE DRAWING

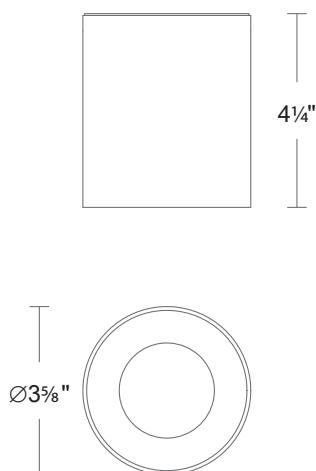

Standard Trim

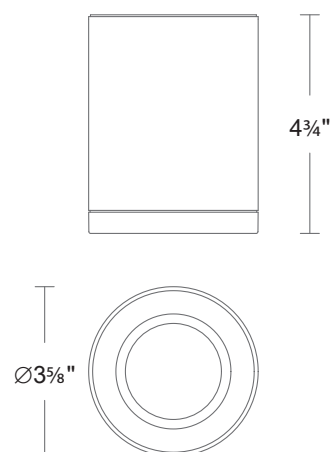

Arc Trim

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

ZORON C4RL

Round Trimless Ceiling Mount



Standard Trim

Model	Power	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy (lm/W)	Body Finish	Trim Finish
C4RL	15W	N Narrow 25°	CS	90	2700K	1015	2985	BK Black WT White	BK Black
					3000K	1060	3310		CH Chrome
					3500K	1100	3235		GL Gold
					4000K	1130	3330		HZ Haze
					5000K	1185	3485		WT White
		F Flood 45°	CS	90	2700K	1135	1945	BK Black WT White	BK Black
					3000K	1180	2025		CH Chrome
					3500K	1230	2105		GL Gold
					4000K	1265	2165		HZ Haze
					5000K	1325	2265		WT White

C4RL- _CS- _

Example: **C4RL-FCS-WTHZ**

Arc Trim

Model	Power	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy (lm/W)	Trim Finish*
C4RL	15W	N Narrow 25°	CS	90	2700K	910	3075	PBK Arc Black PWT Arc White
					3000K	945	3200	
					3500K	985	3330	
					4000K	1010	3425	
					5000K	1060	3585	
		F Flood 45°	CS	90	2700K	1065	1950	PBK Arc Black PWT Arc White
					3000K	1110	2035	
					3500K	1150	2115	
					4000K	1185	2175	
					5000K	1240	2275	

C4RL- _CS-P _

Example: **C4RL-NCS-PBK**

*When ordering Arc trim, body finish will match trim finish.