


ZORON C4SL

Square Trimless Ceiling Mount

WAC®

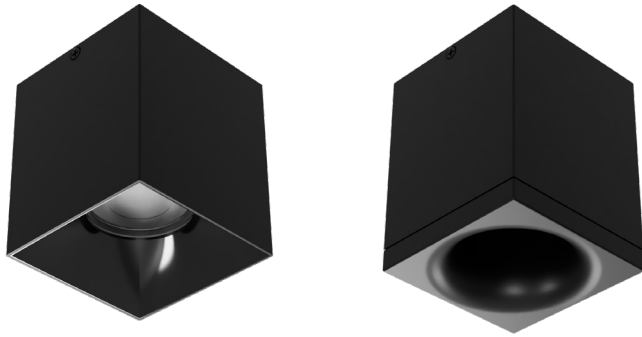

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The Zoron series combines sleek aesthetics with exceptional performance. Compact and stylish enough for residential applications, yet powerful enough to be used commercially. With built-in color temperature selection and the option to be used either indoors or out, Zoron adapts to any setting. Regressed trims and specialized TIR optics provide both aesthetic appeal and glare control, making Zoron the perfect blend of form and function.


FEATURES

- Die-cast aluminum construction
- 5-CCT Switchable between 2700K and 5000K
- Suitable for indoor or outdoor use
- Low glare regressed trim with 25°+ shielding angle
- Driver concealed within the fixture


SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	ELV, TRIAC, 0-10V: 100-5%
Light Source:	Integrated LED
Finish:	Electrostatically powder coated: White, Black Injection molded polycarbonate: Black, Chrome, Gold, Haze, White
Standards:	UL, cUL, IP65, Title 24 JA8 Compliant, Wet Location Listed
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

LINE DRAWING

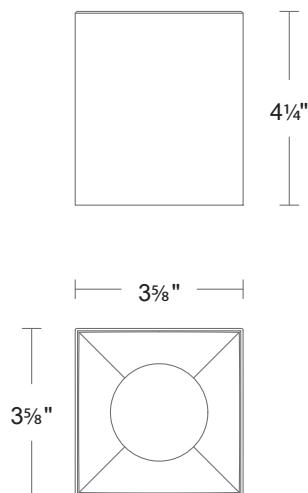

Standard Trim

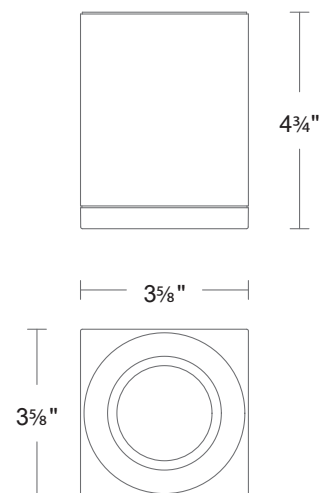

Arc Trim

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

ZORON C4SL

Square Trimless Ceiling Mount



Standard Trim

Model	Power	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy (lm/W)	Body Finish	Trim Finish	
C4SL	15W	N Narrow 25°	CS	90	2700K	1015	2985	68	BK Black WT White	BK Black CH Chrome GL Gold HZ Haze WT White
					3000K	1060	3310	71		
					3500K	1100	3235	73		
					4000K	1130	3330	75		
					5000K	1185	3485	79		
		F Flood 45°	CS	90	2700K	1135	1945	76	BK Black WT White	BK Black CH Chrome GL Gold HZ Haze WT White
					3000K	1180	2025	79		
					3500K	1230	2105	82		
					4000K	1265	2165	84		
					5000K	1325	2265	88		

C4SL- _CS- _

Example: **C4SL-FCS-WTHZ**

Arc Trim

Model	Power	Beam	Color Temp	CRI	Lumens	CBCP	Efficacy (lm/W)	Trim Finish*		
C4SL	15W	N Narrow 25°	CS	90	2700K	910	3075	61	PBK PWT	Arc Black Arc White
					3000K	945	3200	63		
					3500K	985	3330	66		
					4000K	1010	3425	67		
					5000K	1060	3585	71		
		F Flood 45°	CS	90	2700K	1065	1950	71	PBK PWT	Arc Black Arc White
					3000K	1110	2035	74		
					3500K	1150	2115	77		
					4000K	1185	2175	79		
					5000K	1240	2275	83		

C4SL- _CS-P_

Example: **C4SL-NCS-PBK**

*When ordering Arc trim, body finish will match trim finish.

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761