CUBE ARCHITECTURAL DC-WD05

LED Wall Mounts

WAC LIGHTING®

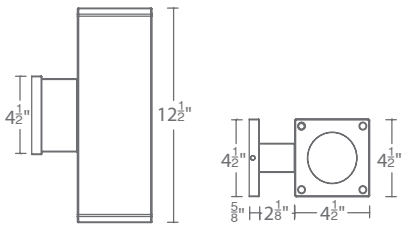

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The latest energy efficient LED technology in an appealing cubical profile delivers accent and wall wash lighting. Comes in various light distribution and beam angle options.

FEATURES

- Single light extended body high performance exterior rated LED wall mount
- Fixture can install upside down to alter light distribution
- Solid aluminum construction
- 5 year warranty

SPECIFICATIONS

Input:	Universal voltage 120V - 277VAC, 50/60Hz
Dimming:	Electronic low voltage (ELV) : 100% - 5% 0-10V: 100% - 1%
Light Source:	High output 3 Step Mac Adam Ellipse COB Rated life of 60,000 hours at L70
Finish:	Electrostatically powder coated, white, black, bronze and graphite
Standards:	IP65 rated, UL & cUL wet location listed, Title 24 JA8 Compliant
Operating Temp:	-13°F to 122°F (-25°C to 50°C)

ORDERING NUMBER

Diameter		Watt	Beam	Beam Angle	Color	Temp	CRI	Reference Lumen	Output[1] CBCP	Efficacy (lm/w)	Light Distribution
DC-WD05	*5″*	*25W*	**S** *Straight up and down*	*16°*	**927S**	*2700K*	*90*	*1825*	*10050*	*73*	
					827S	*2700K*	*85*	*2190*	*12057*	*88*	
					930S	*3000K*	*90*	*1895*	*10427*	*76*	
					830S	*3000K*	*85*	*2300*	*12644*	*92*	
					835S	*3500K*	*85*	*2350*	*12937*	*94*	
					840S	*4000K*	*85*	*2375*	*13062*	*95*	
			N *Straight up and down*	*25°*	**927S**	*2700K*	*90*	*1810*	*5280*	*72*	
					827S	*2700K*	*85*	*2170*	*6335*	*87*	
					930S	*3000K*	*90*	*1880*	*5478*	*75*	
					830S	*3000K*	*85*	*2275*	*6643*	*91*	
					835S	*3500K*	*85*	*2330*	*6797*	*93*	
					840S	*4000K*	*85*	*2350*	*6863*	*94*	
DC-WE0517	*5″*	*17W*	**F** *Straight up and down*	*33°*	**927S**	*2700K*	*90*	*1900*	*4515*	*76*	
					827S	*2700K*	*85*	*2280*	*5417*	*91*	
					930S	*3000K*	*90*	*1970*	*4685*	*79*	
					830S	*3000K*	*85*	*2390*	*5681*	*96*	
					835S	*3500K*	*85*	*2445*	*5812*	*98*	
					840S	*4000K*	*85*	*2470*	*5870*	*99*	
			F *Away from the wall*	*N/A*	**927A**	*2700K*	*90*	*2000*	*N/A*	*80*	
					827A	*2700K*	*85*	*2400*		*96*	
					930A	*3000K*	*90*	*2075*		*83*	
					830A	*3000K*	*85*	*2520*		*101*	
					835A	*3500K*	*85*	*2575*		*103*	
					840A	*4000K*	*85*	*2600*		*104*	
			F *Towards the wall*	*N/A*	**927B**	*2700K*	*85*	*2000*	*N/A*	*80*	
					827B	*2700K*	*90*	*2400*		*96*	
					930B	*3000K*	*85*	*2075*		*83*	
					830B	*3000K*	*90*	*2520*		*101*	
					835B	*3500K*	*85*	*2575*		*103*	
					840B	*4000K*	*85*	*2600*		*104*	

Finish

BK *Black*
WT *White*
BZ *Bronze*
GH *Graphite*

DC-WD05-_____-____

Example: **DC-WD05-F930A-WT**

[1]Reference output shows 25W output. Multiply by 0.7 to determine output for 17W combinations

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.