


HR-LED418-NIC-RO – Invisible Trim™

Photometrics


WAC LIGHTING

Responsible Lighting®


2700K

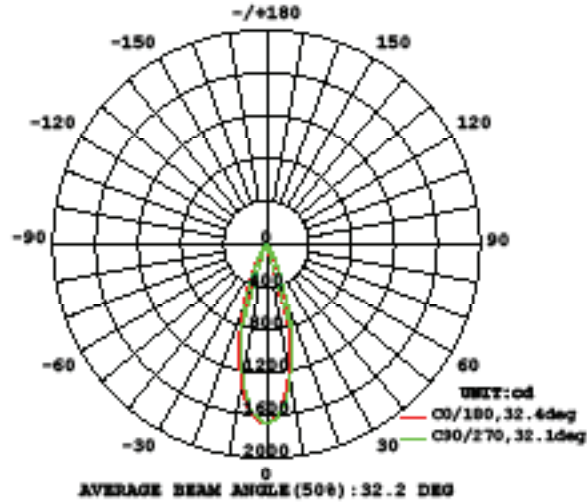


3000K

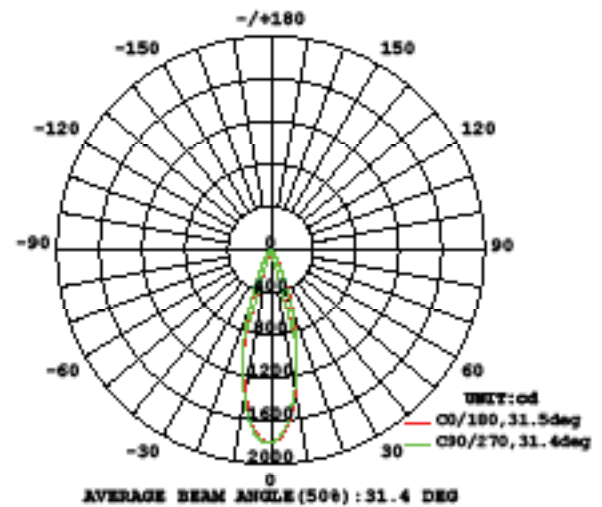

3500K

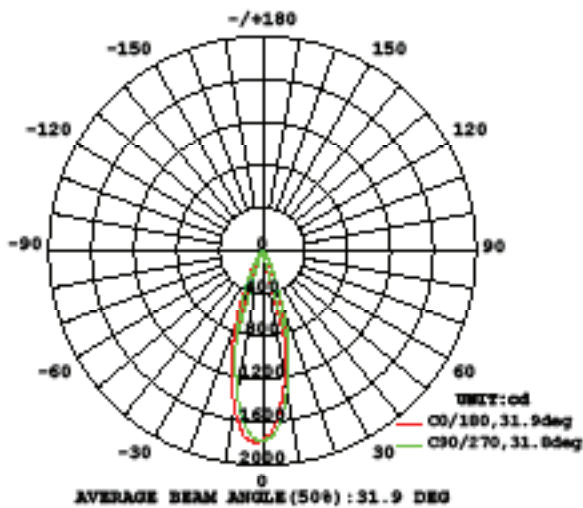

4500K

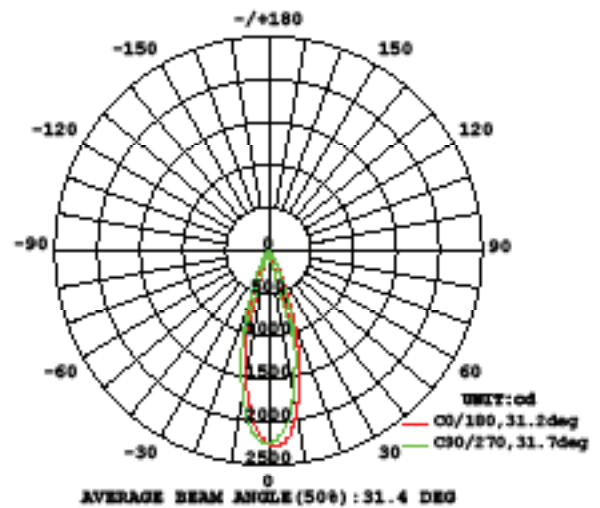

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585


HR-LED418-N-RO – Invisible Trim™

Photometrics


WAC LIGHTING

Responsible Lighting®


2700K

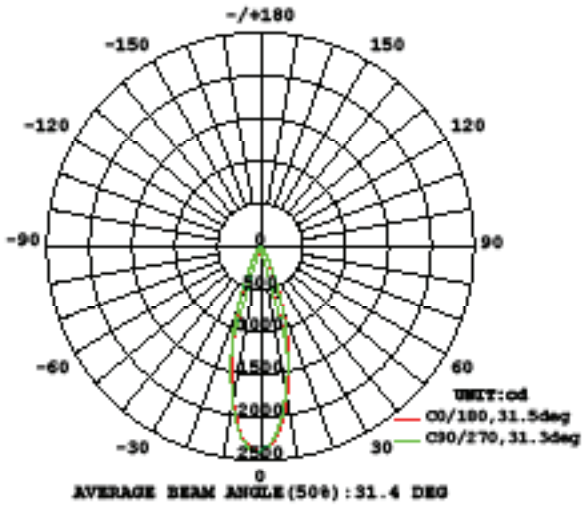


3000K

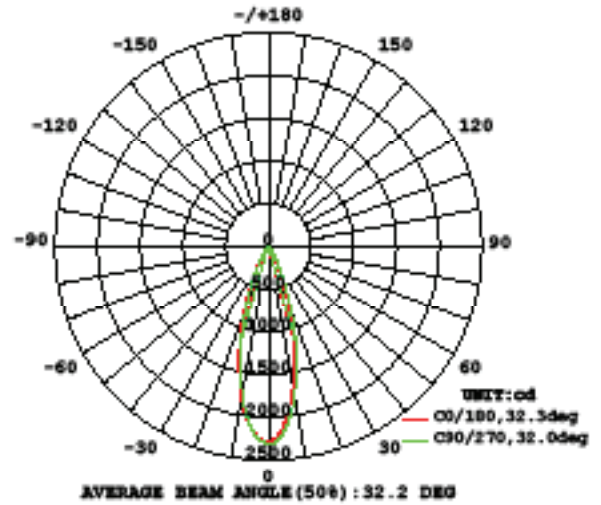

3500K

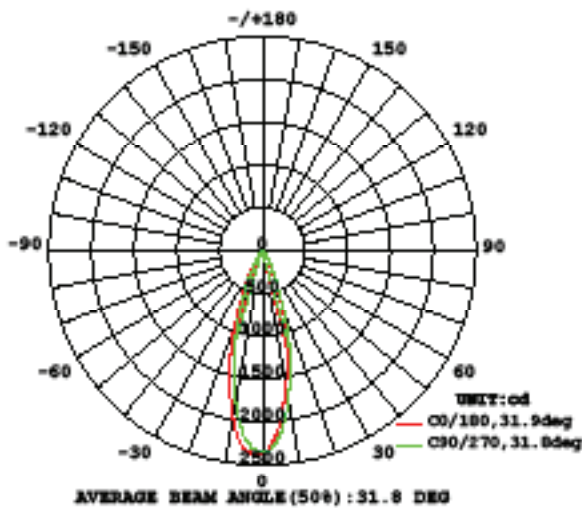

4500K

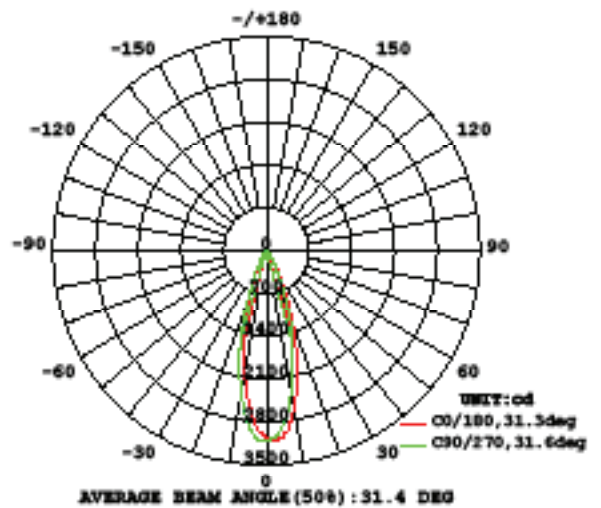

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585


Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585

HR-LED418-N-RO-XX-EM – Invisible Trim™

4" LEDme – Non-IC, New Construction Housing
Emergency Backup Battery

WAC LIGHTING
Responsible Lighting®

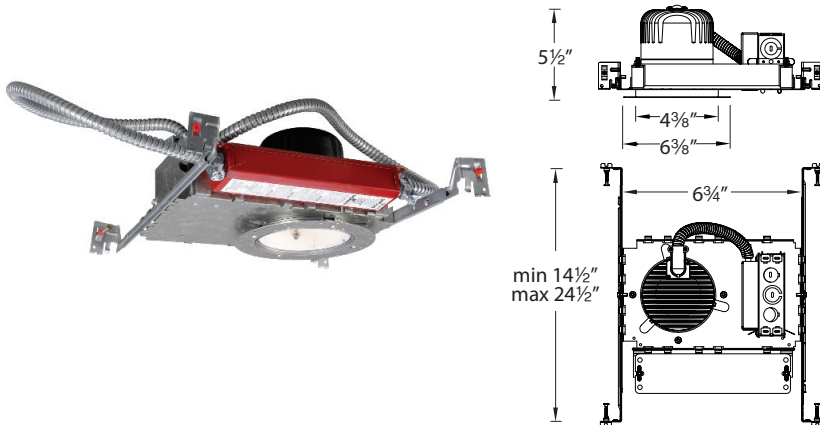

Fixture Type:

Catalog Number:

Project: _____

Location: _____

PRODUCT DESCRIPTION

4 inch LEDme® Invisible Trim™ Non-IC new construction housing, includes six 3W LED's. Includes spackle ring to permit a stable finished installation with a drywall ceiling. For use with LEDme® 4 inch round Invisible Trims™.

FEATURES

- Energy Star®
- Cutout: 4 3/8"
- 90 min emergency backup battery
- Trims recess into housings flush to the ceiling
- 100,000 hour rated life
- Accommodates ceiling thickness up to 1"
- UL and CUL Listed
- 5 year WAC Lighting product warranty

FIXTURE PERFORMANCE

Model #	Color Temp	Watt	Lumens	Efficacy	CRI
HR-LED418-N-RO-27	2700K	16W	846	56.4 Lm/W	85
HR-LED418-N-RO-30	3000K	16W	846	56.4 Lm/W	85
HR-LED418-N-RO-35	3500K	16W	901	60.1 Lm/W	80
HR-LED418-N-RO-40	4000K	16W	1135	67.1 Lm/W	75

ORDER NUMBER

Model #	Color Temp	EM Battery
HR-LED418-N-RO	27 2700K	EM
	30 3000K	
	35 3500K	
	40 4000K	

REPLACEMENT MODULES

Model #	Color Temp
RM6X3-27-DL	2700K
RM6X3-30-DL	3000K
RM6X3-35-DL	3500K
RM6X3-40-DL	4000K

HR-LED418-N-RO – – EM

Example: HR-LED418-N-RO-EM

COMPATIBLE TRIMS

Model #	Description	Finish – (where there is a slash (/) the letters correspond as: interior finish/exterior finish)
HR-LED411TL	Round, Open Reflector Downlight	Black/Brushed Nickel (BK/BN), Black/White (BK/WT), White/White (WT/WT)
HR-LED421TL	Round, Step Baffle Downlight	Black/Brushed Nickel (BK/BN), Black/White (BK/WT), White/White (WT/WT)

Example: HR-LED411TL-BK/BN

See individual trim spec sheets for complete information.

WAC Lighting

www.waclighting.com

Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive • Port Washington, NY 11050

Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center

1750 Archibald Avenue • Ontario, CA 91760

Phone (800) 526.2588 • Fax (800) 526.2585


HR-LED418-N-RO-XX-EM

Invisible Trim™ – Photometrics


WAC LIGHTING

Responsible Lighting®


2700K

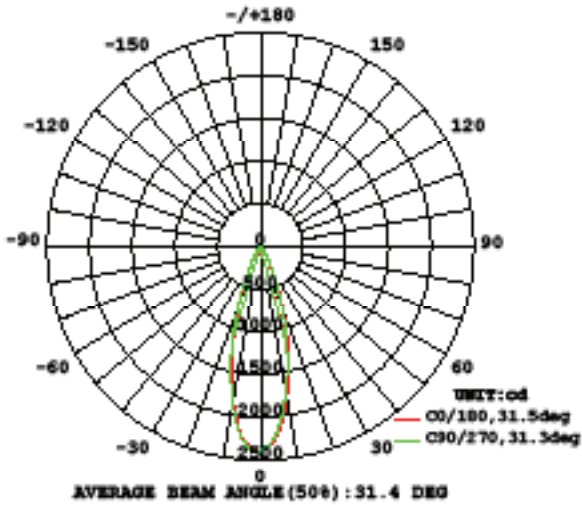


3000K

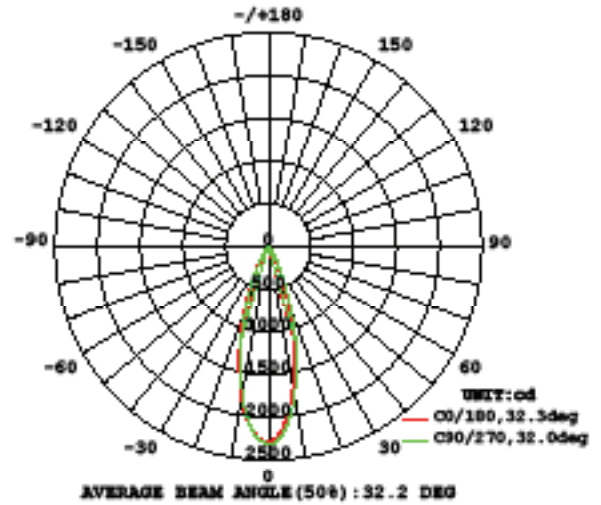

3500K

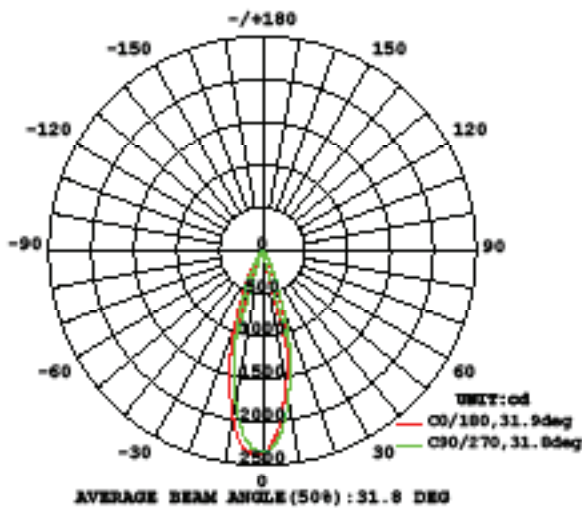

4500K

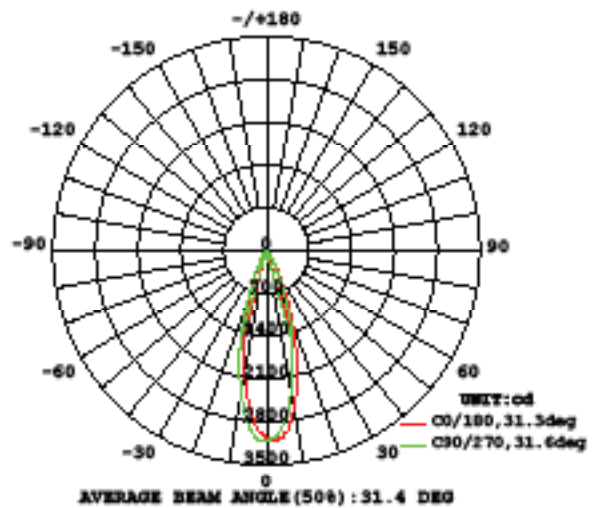

WAC Lighting
www.waclighting.com
Phone (800) 526.2588 • Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive • Port Washington, NY 11050
Phone (516) 515.5000 • Fax (516) 515.5050

Western Distribution Center
1750 Archibald Avenue • Ontario, CA 91760
Phone (800) 526.2588 • Fax (800) 526.2585