


# PIXELS TUNABLE WHITE

## LED Light Sheet

# WAC

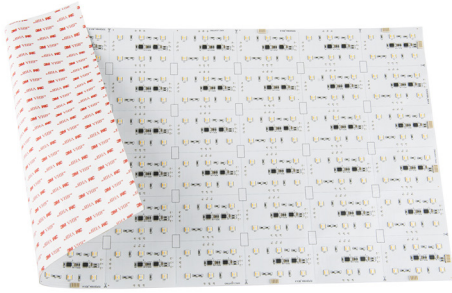

Fixture Type:

Catalog Number:

Project:

Location:

### PRODUCT DESCRIPTION

Professional flexible light sheet creates uniform and linear illumination. Easy installation in any minimal size application with no heat sink needed. Architectural grade white light sheet that delivers precise color consistency and brightness throughout the area. With a high lumen output, choose a Color Temperature anywhere from 1800K to 5000K for a unique and custom lighting effect.

### FEATURES


- With a lightweight, ultra-thin 1/8" profile
- Tune to desired CCT from 1800K to 5000K with DMX/RDM control or mobile app
- Even illumination of translucent surfaces from as little as 1/2" behind
- May be field-cut vertically or horizontally, in unique shapes or around obstructions
- Powers easily by daisy chaining with Gold plated connectors or from any square at soldering points provided
- Versatile Mounting Options:  
3M-construction adhesive adheres to most surfaces (flat or curved), or open rectangles indicate where it can be stapled through
- Can be installed in either exposed or fully enclosed spaces

### SPECIFICATIONS

- Input:** 24VDC
- Max Run:** Depends on Color & Dimming level
- Control:** Through CTR-WDMX-3CH, Wireless DMX LED Controller
- CRI:** 90+
- McAdams Steps:** 3
- Color Temp:** 1800-5000K
- Operating Temp:** -4°F to 104°F (-20°C to 40°C)
- Standards:** UL & CUL Listed for Dry and Damp Locations

Model	Dimension	LED Lumens	Watt	Color Temp	Color
<b>LED P05 P10</b>	<b>1224</b> 12" x 24"	Refer to pg. 3 & 4		<b>1850</b> 1800K - 5000K	White

Example: LED-P10-1224-1850

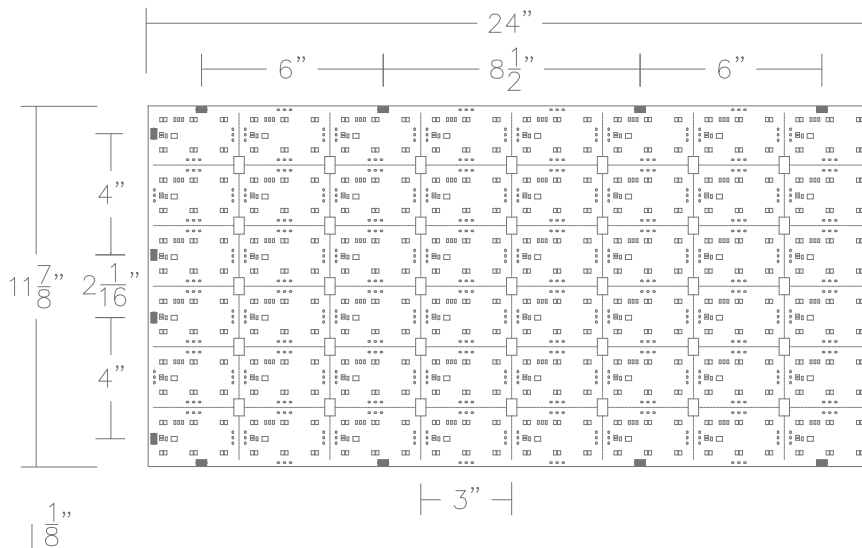

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91761




# PIXELS TUNABLE WHITE

## Accessories & Power Supply




### LED Controller / Power Supplies / User Interface Controller (REQUIRED)

LED Controller	Model	Input	Output	Dimension	Description
	<b>CTR-WDMX-3CH</b>	3 X 24VDC (96W) Or 1 X 24VDC (300W)	3 X 24VDC (96W)	7 7/8" x 3 7/8" x 1 13/16"	UL Listed Class 2 Output 3 DMX/RDM Individual Addressable Output Channels DMX Port RJ45/XLR 3 Pins / Phoenix Connector Support both RGBWW / Tunable White Wireless interface with WAC mobile app and cloud access control
Includes: 3 pcs T24-EX3-072-WT					

Power Supplies	Model	Input	Output	Dimension	Description
	<b>PS-24DC-U96R-S6</b>	120-277VAC	24VDC, 96W	7 7/8" x 3 7/8" x 1 13/16"	UL Listed Class 2 Output (5 Years Warranty)
	<b>PS-24DC-U300R</b>	120-277VAC	24VDC, 300W	11 7/16" X 5 3/16" X 1 15/16"	300W Output UL Listed, Class P, Type HL 5 Year Warranty

### User Interface Controller

	Model	Input	Output	Dimension	Description
	<b>LED-WCT-WT</b>	120-230VAC	N/A	4 5/8" X 2 3/8" X 1 5/8"	Wi-Fi Wall Controller Scene button can be programmed through WAC mobile app cUL listed

waclighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91761

# PIXELS TUNABLE WHITE

## DMX Value & Power Consumption

**WAC**  
LED-P05-1224-1850

### POWER CONSUMPTION AND MAXIMUM RUN

Power consumption depends on the color and dimming level. A lookup table below shows the light output at maximum level from PIXELS TUNABLE WHITE. The maximum run length value is at maximum brightness of particular CCT with 96W power supply.

#### DMX Value

CCT (K)	Power (W)	Lumen	DMX Value			
			CH1: 1800K	CH2: 2700K	CH3: 5000K	CH4: 18/27/50
1800K	12.7	354	255	0	0	255
1900K	14.0	449	255	6	0	255
2000K	14.8	490	255	20	0	255
2100K	16.1	582	255	70	0	255
2200K	17.5	693	170	255	0	255
2300K	16.2	614	75	255	0	255
2400K	15.3	560	35	255	0	255
2500K	14.3	496	9	255	0	255
2600K	13.5	448	1	255	0	255
2700K	12.8	405	0	255	0	255
2900K	13.5	460	0	255	1	255
3000K	14.0	500	0	255	5	255
3100K	14.5	536	0	255	12	255
3200K	14.9	570	0	255	22	255
3300K	15.6	625	0	255	45	255
3400K	16.3	682	0	255	80	255
3500K	16.9	730	0	255	120	255
3600K	17.8	803	0	255	200	255
3700K	18.3	844	0	255	255	255
3800K	17.4	780	0	165	255	255
3900K	16.8	735	0	115	255	255
4000K	16.3	696	0	80	255	255
4100K	15.7	652	0	50	255	255
4200K	15.2	615	0	30	255	255
4300K	14.8	590	0	20	255	255
4400K	12.9	574	0	15	255	255
4500K	14.6	546	0	8	255	255
4600K	14.0	530	0	5	255	255
4700K	13.7	507	0	2	255	255
4800K	13.5	494	0	1	255	255
5000K	12.9	444	0	0	255	255

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91761

# PIXELS TUNABLE WHITE

## DMX Value & Power Consumption

**WAC**  
LED-P10-1224-1850

### POWER CONSUMPTION AND MAXIMUM RUN

Power consumption depends on the color and dimming level. A lookup table below shows the light output at maximum level from PIXELS Tunable. The maximum run length value is at maximum brightness of particular CCT with 96W power supply.

#### DMX Value

CCT (K)	Power (W)	Lumen	DMX Value			
			CH1: 1800K	CH2: 2700K	CH3: 5000K	CH4: 18/27/50
1800K	19.7	779	255	0	0	255
1900K	22.5	982	255	6	0	255
2000K	24.1	1103	255	20	0	255
2100K	27.0	1310	255	70	0	255
2200K	30.1	1559	170	255	0	255
2300K	27.2	1378	75	255	0	255
2400K	25.3	1256	35	255	0	255
2500K	23.0	1112	9	255	0	255
2600K	21.2	1004	1	255	0	255
2700K	19.7	909	0	255	0	255
2800K	19.3	1119	0	236	12	255
2900K	21.3	1032	0	255	1	255
3000K	22.3	1120	0	255	5	255
3100K	23.4	1201	0	255	12	255
3200K	24.3	1276	0	255	22	255
3300K	25.8	1398	0	255	45	255
3400K	27.4	1522	0	255	80	255
3500K	28.7	1627	0	255	120	255
3600K	30.8	1792	0	255	255	255
3700K	31.9	1884	0	255	255	255
3800K	30.0	1739	0	165	255	255
3900K	28.6	1639	0	115	255	255
4000K	27.4	1553	0	80	255	255
4100K	26.1	1456	0	50	255	255
4200K	25.0	1373	0	30	255	255
4300K	24.2	1317	0	20	255	255
4400K	23.7	1283	0	15	255	255
4500K	22.9	1123	0	8	255	255
4600K	22.4	1189	0	5	255	255
4700K	21.7	1135	0	2	255	255
4800K	21.3	1107	0	1	255	255
4900K	19.3	1248	0	15	235	255
5000K	19.3	1252	0	10	240	255
5100K	19.8	994	0	0	255	255

**wacighting.com**  
Phone (800) 526.2588  
Fax (800) 526.2585

**Headquarters/Eastern Distribution Center**  
44 Harbor Park Drive  
Port Washington, NY 11050

**Central Distribution Center**  
1600 Distribution Ct  
Lithia Springs, GA 30122

**Western Distribution Center**  
1750 Archibald Avenue  
Ontario, CA 91761