PIXELS

Configurable LED Light Sheet

WAC LIGHTING
Responsible Lighting®

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Professional flexible light sheet creates uniform and linear illumination. Easy installation in any minimal size application with no heat sink needed.

FEATURES

- With a lightweight, ultra-thin 1/8" profile
- Even illumination of translucent surfaces from as little as 1/2" behind
- May be field-cut vertically or horizontally, in unique shapes or around obstructions
- Powers easily by daisy chaining with integral push-in connectors or from any square at soldering points provided
- Versatile Mounting Options:

3M-construction adhesive adheres to most surfaces (flat or curved), or open rectangles indicate where it can be stapled through

- Can be installed in either exposed or fully enclosed spaces
- Specially rated for installation in the storage area of a clothes closet

SPECIFICATIONS

Power Supply: Remote and electronic Class 2 DC power supply
120-277VAC 50/60Hz input, up to 96W output

Light Source: 144 LEDs/sq ft (1 inch pitch)

Dimming: Electronic Low Voltage (ELV); electronic 0-10V

Operating Temp: -4°F to104°F (-20°C to 40°C) at relative humidity 95%

Standards: ETL & cETL Listed for Dry and Damp Locations

Model		Dimension		*LED Lumens*	*Watt*	*Color Temp*		Color
LED	**P05** **P10**	**1224**	*12" x 24"*	*500 lm/sq ft* *1000 lm/sq ft*	*5W/sq ft* *10W/sq ft*	**27** **30** **35** **40** **50**	*2700K* *3000K* *3500K* *4000K* *5000K*	*White*

LED-P___-1224-__
Example: **LED-P10-1224-30**

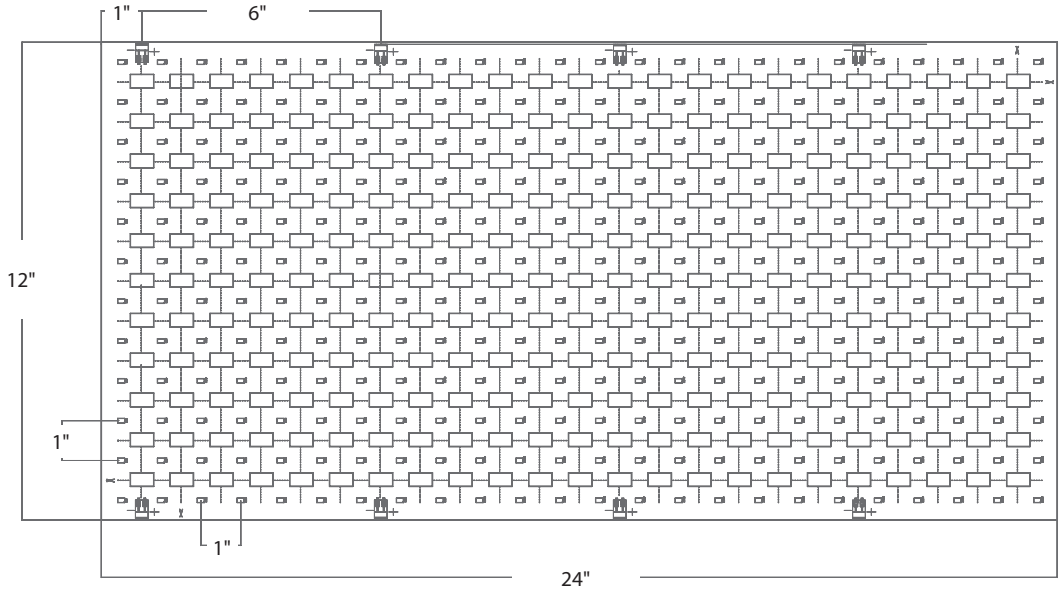

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. AUG 8, 2020

PIXELS

Configurable LED Light Sheet

WAC LIGHTING
Responsible Lighting®

Required

Type		Model	Input	Output	Max Coverage	Dim	
Remote		**EN-24100-277-RB2**	*120-277VAC*	*24VDC / 96W Class 2*	*20 sqft (P05) 10 sqft (P10)*	*0-10V*	*Includes a 6 foot lead wire*
Wall Dimmer & Driver		**EN-D24100-120-R**	*120VAC*	*24VDC / 96W Class 2*	*20 sqft (P05) 10 sqft (P10)*	*Integral*	
Remote		**EN-24DC060-UNV-RB2** **EN-24DC096-UNV-RB2**	*120VAC*	*24VDC / 60W Class 2* *24VDC / 96W Class 2*	*12 sqft (P05) 6 sqft (P10)* *20 sqft (P05) 10 sqft (P10)*	*ELV/TRIAC*	

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. AUG 8, 2020