

120/277VAC, 6 X 600MA (2-21VDC)

Dimmable Remote Power Supply



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

FINISHES



Black

Model & Product	L x W x H
PS-0600A-UR6	10 7/8" x 3 7/8" x 1 1/4"

PRODUCT DESCRIPTION

This class 2 UL & cUL listed enclosed electronics power supply is one of the most exciting LED power supplies available. What makes this dimmable LED power supply unique is that it has 6 output terminals with time saving terminate conductors from 24-12 AWG of solid, stranded and fine-stranded conductors by pull the lever up, insert a conductor and push the lever back down. It is compatible with TRIAC/ELV or 0-10V dimmer. Additionally, it features different kinds of protection from over voltage to short circuit. It is incredibly robust and includes a 5 years warranty. It works with an input voltage of 120-277VAC so you can utilize it for many commercial applications. It features an integrated wiring compartment for a streamlined installation.


FEATURES

- Universal Input 120-277VAC
- ≥ 0.9 pf
- Overload and short circuit protection
- TRIAC/ ELV/0-10V Dimming Control
- 0-10V Dimming curve adjustment
- Class 2 Output
- 5 Year warranty

SPECIFICATIONS

Input:	120-277VAC
Output:	6 X 600mA, 2-21VDC
Dimming:	TRIAC/ELV/0-10V: 100-1% 0-10V Minimum Current Source: 95uA 0-10V Maximum Current Sink: 150uA
Rated Life:	50,000 hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed,

LINE DRAWING

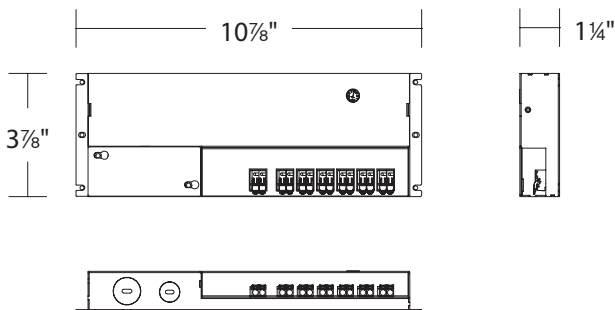

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91760