

R2FRNM, R2FSNM

FQ 2" New Construction Millwork Housing

WAC LIGHTING

SPECIFICATIONS

- Input** Universal 120-277V AC 50/60 Hz
- Standards:** ETL & cETL, IC-rated, Airtight, SPCL (Spray Foam Compatible Luminaire), up to R6.8 per inch, as per UL 1598
- Dimming:** Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100-1%
- Mounting:** New construction housings included with universal mounting brackets and hanger bars
Ceiling Cutout (Round): Ø 3-1/8"
Ceiling Cutout (Square): 2-9/16" x 2-9/16"
See next page for ceiling thickness information
- Construction:** 20 Gauge galvanized steel
- Warranty:** 5 year WAC Lighting product warranty


Fixture Type:

Catalog Number:

Project:


Location:

Round, New Construction Millwork

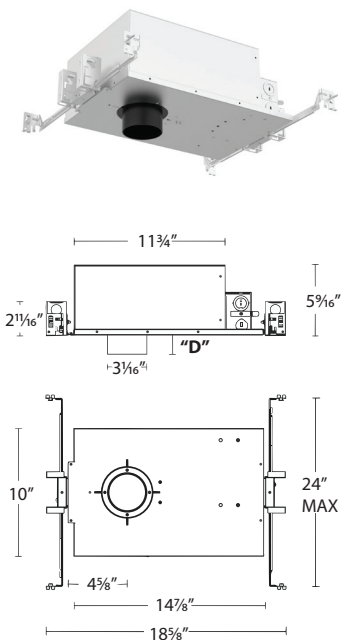

Model	Collar Depth "D"
R2FRNM-A	¾"
R2FRNM-B	1-½"

Square, New Construction Millwork

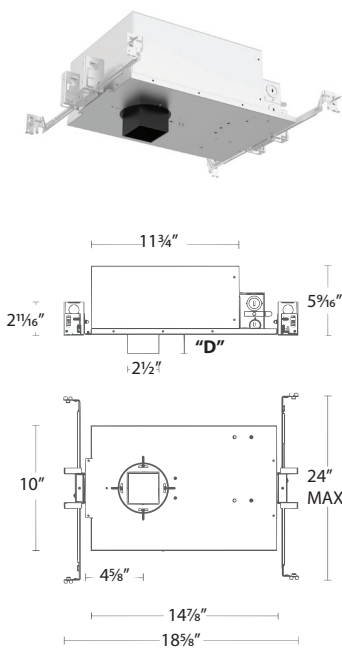

Model	Collar Depth "D"
R2FSNM-A	¾"
R2FSNM-B	1-½"

	Model	Ceiling Thickness	Power	Rating	Compatible Trims
Round New Construction, Millwork	R2FRNM	A 0.25" to 0.75" B 0.75" to 1.5"	1 15W	IC, SPCL	R2FRDL, R2FRAL, R2FRPL, R2FRWL
Square New Construction, Millwork	R2FSNM		2 21W 3 25W	IC Non-IC	R2FSDL, R2FSAL, R2FSPL, R2FSWL

R2F__NM-__-__

Example: **R2FRNM-A-1**

R2FRNM, R2FSNM

FQ 2" New Construction Millwork Housing

WAC LIGHTING

REPLACEMENT DRIVER


Housing Model	Power	Replacement Driver Model
R2FRNM-A, R2FRNM-B R2FSNM-A, R2FSNM-B	1 15W	D-R2FN-1
	2 21W	D-R2FN-2
	3 25W	D-R2FN-3

Example: For **R2FRNM-A-2** housing, choose replacement driver model **D-R2FN-2**

MILLWORK HOUSING APPLICATION TABLE

Millwork Housing	Trim Model	Trim Description	Ceiling Thickness				
			1/4"	1/2"	3/4"	1"	1-1/2"
R2FRNM-A Round 1/4" to 3/4"	R2FRDL	Downlight	Yes	Yes	Yes	N/A	
	R2FRPL	Pinhole	Yes	Yes	Yes		
	R2FRAL	Adjustable	Yes, to 35°	Yes, to 35°	Yes, to 35°		
	R2FRWL	Wall Wash	Yes	Yes	Yes		
R2FRNM-B Round 3/4" to 1-1/2"	R2FRDL	Downlight	N/A		Yes	Yes	Yes
	R2FRPL	Pinhole			Yes	Yes	Yes
	R2FRAL	Adjustable			Yes, to 12°	Yes, to 12°	Yes, to 12°
	R2FRWL	Wall Wash			Yes	Yes	Yes
R2FSNM-A Square 1/4" to 3/4"	R2FSDL	Downlight	Yes	Yes	Yes	N/A	
	R2FSPL	Pinhole	Yes	Yes	Yes		
	R2FSAL	Adjustable	Yes, to 25°	Yes, to 25°	Yes, to 25°		
	R2FSWL	Wall Wash	Yes	Yes	Yes		
R2FSNM-B Square 3/4" to 1-1/2"	R2FSDL	Downlight	N/A		Yes	Yes	Yes
	R2FSPL	Pinhole			Yes	Yes	Yes
	R2FSAL	Adjustable			Yes, to 8°	Yes, to 8°	Yes, to 8°
	R2FSWL	Wall Wash			Yes	Yes	Yes

MILLWORK INSTALLATION OVERVIEW

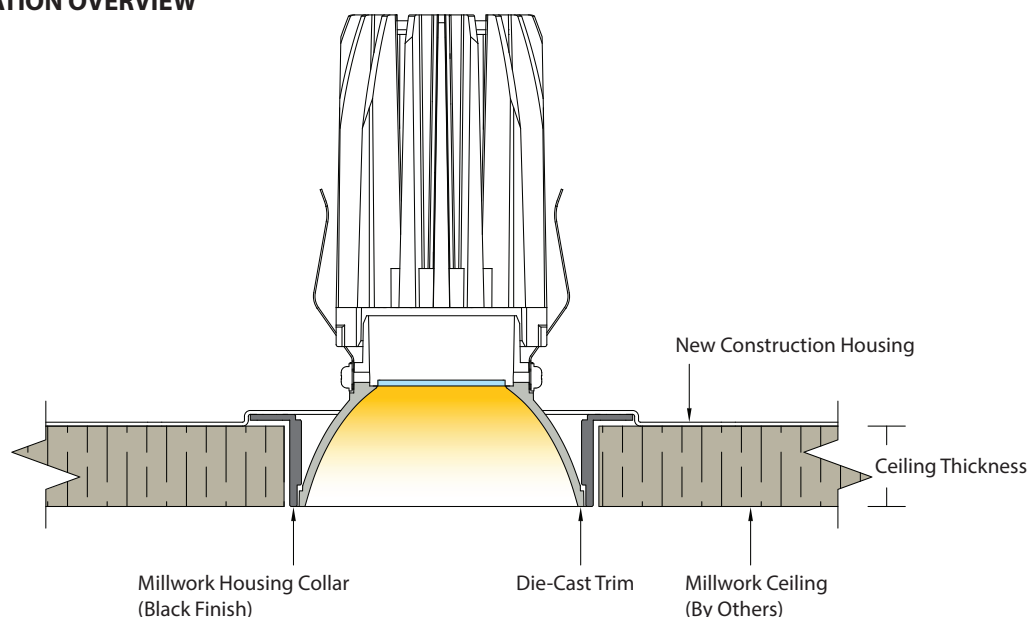

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761