

OCULARC 3.0 DIM-TO-WARM

Downlight - R3BRDN-WD, R3BSDN-WD

WAC



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4¼"

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink

Dimming: ELV or TRIAC or 0-10V dimming compatible

Input: 120-277V

Light Source: 11W 95 CRI Single LED Module. Rated Life: 50,000 hours


Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated

Ceiling thickness: ½" - 1½"

Standards: ETL&cETL listed, Wet location listed

Operating Temperature: -4°F to 104°F (20°C to 40°C)

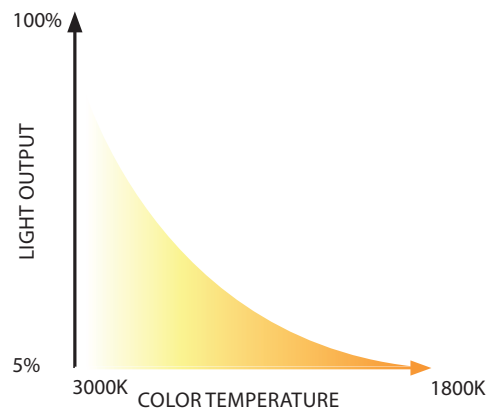

Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	R3BRDN Round Open Reflector Wet Location Listed	S 19° N 27° F 50°	765	3070	WD 3000K - 1800K	WT White BK Black
	R3BSDN Square Open Reflector Wet Location Listed	S 19° N 27° F 50°	735	2850	WD 3000K - 1800K	WT White BK Black

R3B - WD-
 Example: R3BRDN-SWD-WT

wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761