

TRIMMED HOUSING

4.5" Volta Tunable White

WAC

SPECIFICATIONS

Input: Universal 120 - 277V AC 50/60 Hz

Standards: ETL & cETL, IC rated, Airtight (see below for list)

Dimming: 2 Channel 0-10V: 100-0.1%
2 Channel DMX512-A with RDM: 100-0.1%
Linear Dimming. 1st input channel is intensity changing.
2nd input channel is CCT changing.

Mounting: New construction housings included with universal mounting brackets and hanger bars (Min. 14½" & Max. 24½")
Ceiling cut out (Round): Ø5⅝"
Ceiling cut out (Square): 5⅝" x 5⅝"
See next page for ceiling thickness information

Fixture Type:

Catalog Number:


Project:

Location:


Construction: 20 Gauge cold rolled steel

Warranty: 5 year WAC Lighting product warranty


Round New Construction

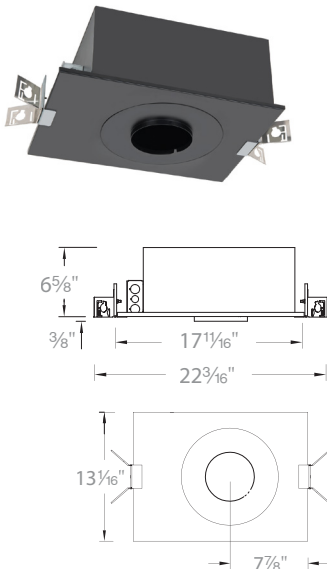

Square New Construction

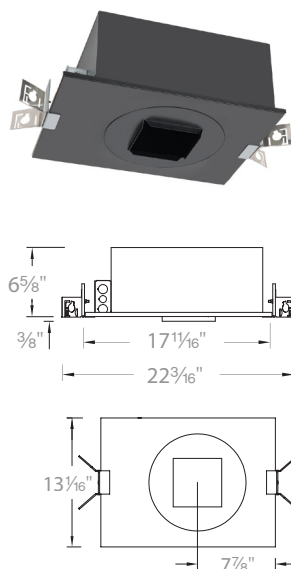

Remodel

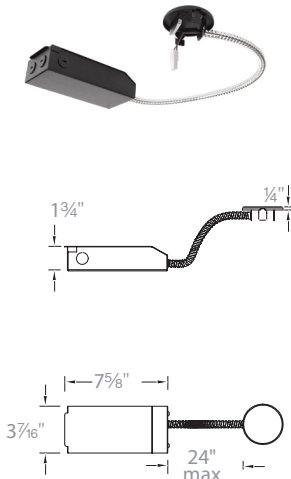

HOUSINGS

	Model	Power	Rating	Driver	Compatible Tunable White Trims
Round New Construction	R4RNT Airtight	15 20W 25 29W 36 44W	IC rated IC rated Non-IC	T-X DMX512-A T-Z 2CH 0-10V	R4RD2T R4RD1T R4RAT R4RWT
Square New Construction	R4SNT Airtight	15 20W 25 29W 36 44W	IC rated IC rated Non-IC	T-X DMX512-A T-Z 2CH 0-10V	R4SD2T R4SD1T R4SAT R4SWT
Remodel	R4BRT Round or Square	15 20W 25 29W 36 44W	Non-IC Non-IC Non-IC	T-X DMX512-A T-Z 2CH 0-10V	R4RD2T, R4SD2T R4RD1T, R4SD1T R4RAT, R4SAT R4RWT, R4SWT

Field Replaceable Driver

R4 -
Example: **R4RNT-15T-X**

D-R4N-15T-X DMX512-A Driver for 20W New Const. Housing
D-R4N-25T-X DMX512-A Driver for 29W New Const. Housing
D-R4N-36T-X DMX512-A Driver for 44W New Const. Housing

D-R4N-15T-Z 2CH 0-10V Driver for 20W New Const. Housing
D-R4N-25T-Z 2CH 0-10V Driver for 29W New Const. Housing
D-R4N-36T-Z 2CH 0-10V Driver for 44W New Const. Housing

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

TRIMMED HOUSING

4.5" Volta Tunable White

WAC

CEILING THICKNESS BY TRIM

Trim Model	Trim Description	Ceiling Thickness		
		1/2"	1"	1 1/2"
R4RD2T R4SD2T	<i>Downlight</i>	Yes	Yes	Yes
R4RD1T R4SD1T	<i>Shallow Regressed Downlight</i>	Yes	Yes	Yes
R4RAT R4SAT	<i>Adjustable</i>	Yes, to 45°	Yes, to 45°	Yes, to 35°
R4RWT R4SWT	<i>Wall Wash</i>	Yes	Yes	No

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761