

R4FBRT-TW, R4FBR2T-TW

FQ 4" Tunable White Remodel Housing

WAC®



SPECIFICATIONS

- Input:** Universal 120-277V AC 50/60 Hz
- Standards:** ETL & cETL
- Dimming:** MyWAC App and WAC-Mesh WallStation: 100-0.1%
- Mounting:** Ceiling thickness: 1/2" - 1 1/4"
Ceiling cutout: Ø 4 3/4"
- Construction:** 20 Gauge galvanized steel
Die-cast spackle flange included
- Warranty:** 5 year WAC Lighting product warranty



Fixture Type:

Catalog Number:

Project: _____

Location: _____

Remodel Non-IC

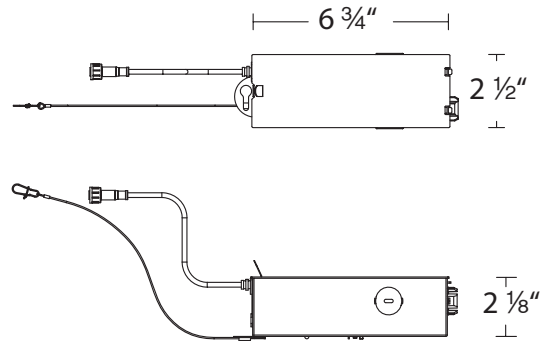



Model	Power	Rating
R4FBRT-TW	1 14W	Non-IC
Round and Square Trim	2 19W	Non-IC
	3 26W	Non-IC

R4FBRT-TW-__

Example: R4FBRT-TW-2

Remodel IC

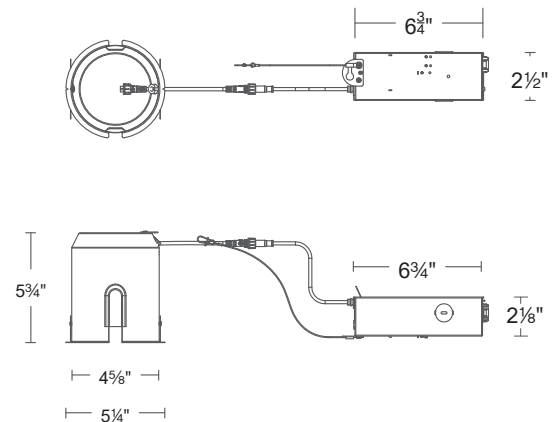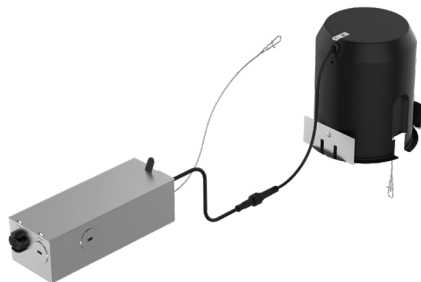

Model	Power	Rating
R4FBR2T-TW	1 14W	IC
Round and Square Trim		

R4FBR2T-TW-__

Example: R4FBR2T-TW-1

wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761