

R4RD2L, R4SD2L

4.5" Volta Tunable White - Downlight Trimless

WAC



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Volta 4.5" Tunable White recessed series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

FEATURES

- Natural and Vivid Precision LED CCT Tuning
- 2" lens regress for superior glare control
- Field selectable light engine height for cut-off angle adjustment (30°-34°) and accessory use
- Integral patterned tempered trim lens included standard
- Compatible with wide range of accessories
- 5 year warranty

SPECIFICATIONS

Construction: Durable die-cast self flanged aluminum construction

Input: Universal 120-277V AC 50/60 Hz


Dimming: 2 Channel 0-10V: 100-0.1%
2 Channel DMX512-A, with RDM: 100-0.1%
Linear Dimming. 1st input channel is intensity changing.
2nd input channel is CCT changing.

Light Source: High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70

Mounting: Heavy gauge retention clips support trim firmly.
Safety cabling standard.
Ceiling cut out (Round): $\varnothing 5\frac{1}{8}"$
Ceiling cut out (Square): $5\frac{1}{8}" \times 5\frac{1}{8}"$
Accommodates $\frac{1}{2}"$ - $1\frac{1}{2}"$ ceiling thickness
Remodel Trimless: $\frac{1}{2}"$ - $1"$ ceiling thickness

Finish: Electrostatically powder coated White, Black.
Enamel coated Haze. Plated and brushed copper Bronze.

Standards: ETL & cETL Wet location listed, Title 24 JA8 Compliant

TRIM	Model	Beam	Lumens	BCCP Ref Output*	Color Temp	CRI	Finishes	Reflector/Trim
	R4RD2L Round R4SD2L Square	N 25° Round Square	2295 2445	6420 6835	TWA 1800K-4000K	98	BK CB HZ WT	Black Copper Bronze Haze White
		F 45° Round Square	2185 2315	3600 3805				
		W 60° Round Square	2215 2345	2460 2600				
		N 25° Round Square	2520 2680	6915 7365	TWB 2700K-6500K	98		
		F 45° Round Square	2495 2640	3990 4220				
		W 60° Round Square	2565 2715	2730 2890				

Example: **R4SD2L-NTWA-WT**

*Reference output shows TWA/TWB trim tuned to 3000K with **36** housing. Use multiplier table below to determine the output for other combinations

Lumens & CBCP Multiplier		Color Temperature					
TWA (1800K-4000K)	Housing Power Level	1800K	2200K	2700K	3000K	3500K	4000K
	36 (44W)	0.68	0.82	0.94	1.00	1.07	1.11
	25 (29W)	0.48	0.57	0.66	0.70	0.75	0.78
	15 (20W)	0.33	0.39	0.45	0.48	0.51	0.53
TWB (2700K-6500K)	Housing Power Level	2700K	3000K	3500K	4000K	5000K	6500K
	36 (44W)	0.96	1.00	1.06	1.09	1.12	1.11
	25 (29W)	0.67	0.70	0.74	0.76	0.78	0.78
	15 (20W)	0.46	0.48	0.51	0.52	0.54	0.53

Example: **R4SD2L-NTWA-WT** tuned to 4000K with **36** housing: 2445 lm (Reference Output) x 1.11 (Multiplier) = 2714 lm
6835 CBCP (Reference Output) x 1.11 (Multiplier) = 7586 CBCP

Please see next page for housing, power supply and tool units (required)

wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

R4RD2L, R4SD2L

4.5" Volta Tunable White - Downlight Trimless

WAC

Housing (Required)	Model	Power	Rating	Driver
Round New Construction 	R4RNL <i>Airtight</i>	15 20W 25 29W 36 44W	<i>IC rated</i> <i>IC rated</i> <i>Non-IC</i>	T-X DMX512-A T-Z 2CH 0-10V
Square New Construction 	R4SNL <i>Airtight</i>	15 20W 25 29W 36 44W	<i>IC rated</i> <i>IC rated</i> <i>Non-IC</i>	T-X DMX512-A T-Z 2CH 0-10V
Remodel 	R4RRL <i>Round Trimless</i> R4SRL <i>Square Trimless</i>	15 20W 25 29W 36 44W	<i>Non-IC</i> <i>Non-IC</i> <i>Non-IC</i>	T-X DMX512-A T-Z 2CH 0-10V

Example: **R4RNL-15T-X**


Trimless housings come included with die-cast spackle frame.

Field Replaceable Driver

D-R4N-15T-X DMX512-A Driver for 20W New Const. Housing
D-R4N-25T-X DMX512-A Driver for 29W New Const. Housing
D-R4N-36T-X DMX512-A Driver for 44W New Const. Housing

D-R4N-15T-Z 2CH 0-10V Driver for 20W New Const. Housing
D-R4N-25T-Z 2CH 0-10V Driver for 29W New Const. Housing
D-R4N-36T-Z 2CH 0-10V Driver for 44W New Const. Housing

FIELD CHANGEABLE GLARE CONTROL AND OPTIC SYSTEM

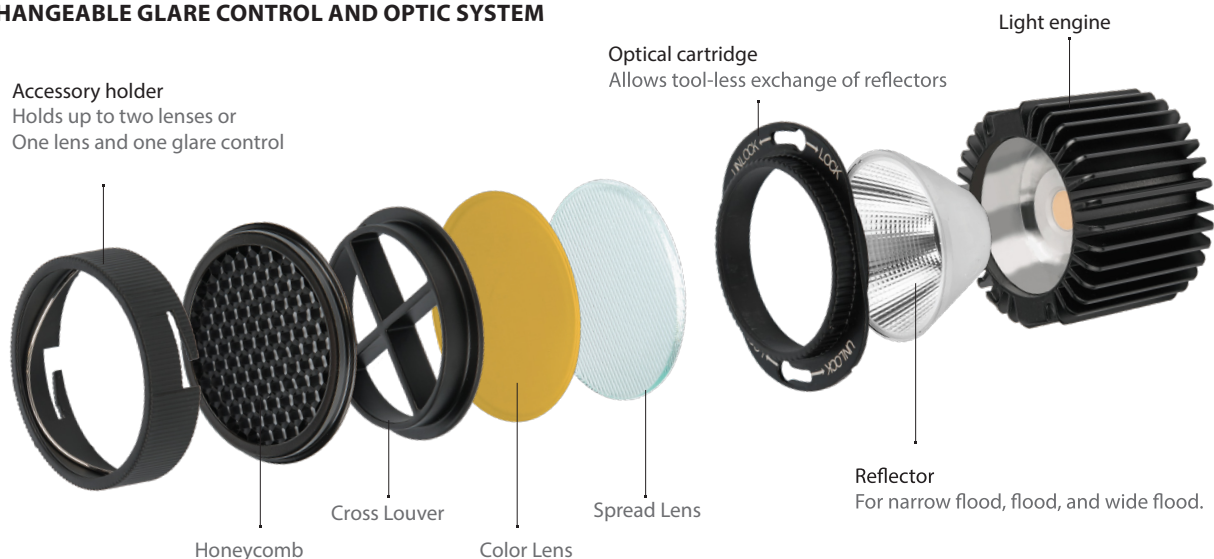

Accessory holder

LENS-73-HLD Required to hold lens and glare control accessories

Glare control accessories

LENS-73-HCL Honeycomb Louver
LENS-73-CRL Cross Louver

Lens

LENS-73-AMB Amber lens
LENS-73-RED Red lens
LENS-73-FR Frosted lens
LENS-73-SPR Spread lens
LENS-73-BEL Beam Elongating

Interchangeable reflector

REF-R4-N Narrow Flood beam reflector
REF-R4-F Flood beam reflector
REF-R4-W Wide beam reflector

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters, East Manufacturing Facility
 44 Harbor Park Drive
 Port Washington, NY 11050

South East Manufacturing Facility
 1600 Distribution Ct
 Lithia Springs, GA 30122

Central Manufacturing Facility
 1700 South J Elmer Freeway, Ste 100
 Cedar Hill, TX 75104

West Manufacturing Facility
 1750 S Archibald Ave
 Ontario, CA 91761

R4RD2L, R4SD2L

4.5" Volta Tunable White - Downlight Trimless



NATURAL TUNABLE WHITE CCT TUNING:

The CCT of the Volta Tunable White fixture may be adjusted.

Using the DMX byte values in the adjacent table mapped to CH1 and CH2 of the desired output, increments of 100K (Kelvin) from 1800K to 4000K for TWA and 2700K to 6500K for TWB, at full intensity.

Note: Through compatible RDM tool, fixture channels can be reassigned to desired consecutive channels. Factory default is DMX channel 1 and 2.

VOLTA 4.5" TUNABLE WHITE DMX BYTE VALUE VS CCT

TWA DMX BYTE VALUES AT FULL INTENSITY			TWB DMX BYTE VALUES AT FULL INTENSITY		
CCT (K)	CH1: Intensity	CH2: CCT	CCT (K)	CH1: Intensity	CH2: CCT
4000	255	255	6500	255	252
3900	255	250	6400	255	249
3800	255	240	6300	255	245
3700	255	230	6200	255	243
3600	255	219	6100	255	241
3500	255	207	6000	255	237
3400	255	196	5900	255	234
3300	255	186	5800	255	230
3200	255	176	5700	255	226
3100	255	163	5600	255	222
3000	255	153	5500	255	218
2900	255	140	5400	255	214
2800	255	130	5300	255	210
2700	255	117	5200	255	205
2600	255	105	5100	255	200
2500	255	92	5000	255	195
2400	255	79	4900	255	190
2300	255	66	4800	255	185
2200	255	51	4700	255	180
2100	255	38	4600	255	175
2000	255	23	4500	255	170
1900	255	10	4400	255	164
1800	255	0	4300	255	158
			4200	255	151
			4100	255	143
			4000	255	134
			3900	255	125
			3800	255	119
			3700	255	110
			3600	255	101
			3500	255	92
			3400	255	83
			3300	255	74
			3200	255	64
			3100	255	53
			3000	255	41
			2900	255	29
			2800	255	15
			2700	255	0

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761