

TRIMLESS REMODEL HOUSING

4.5" Volta Tunable White

WAC

SPECIFICATIONS

Input: Universal 120 - 277V AC 50/60 Hz

Standards: ETL & cETL

Dimming: 2 Channel 0-10V: 100-0.1%

2 Channel DMX512-A with RDM: 100-0.1%

Linear Dimming. 1st input channel is intensity changing.
2nd input channel is CCT changing.

Mounting: Ceiling thickness: $\frac{1}{2}$ - 1"

Ceiling cut out (Round): Ø 5 $\frac{1}{8}$ "

Ceiling cut out (Square): 5 $\frac{1}{8}$ " x 5 $\frac{1}{8}$ "

Construction: 20 Gauge cold rolled steel

Die-cast spackle flange included

Warranty: 5 year WAC Lighting product warranty

Fixture Type:

Catalog Number:



Project:

Location:

Round Remodel




Square Remodel

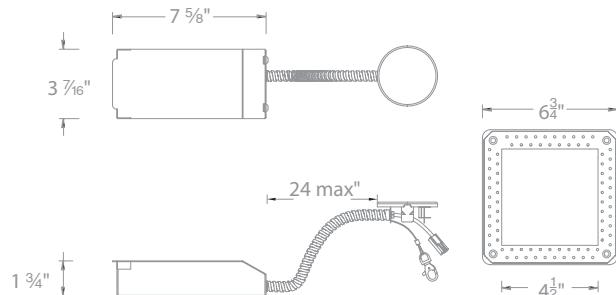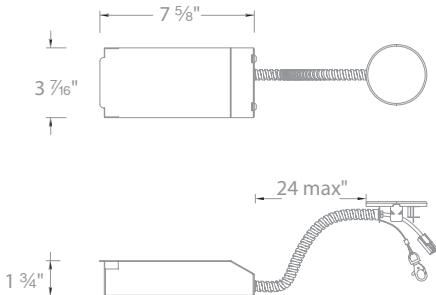

HOUSING (Required)	Model	Trim Type	Power	Driver
Remodel Non-IC	R4RR <i>Round</i> R4SR <i>Square</i>	L Trimless	15 20W 25 29W 36 44W	Non-IC Non-IC Non-IC
			T-X T-Z	DMX512-A 2CH 0-10V

R4 **L-**
Example: **R4RRL-15T-X**

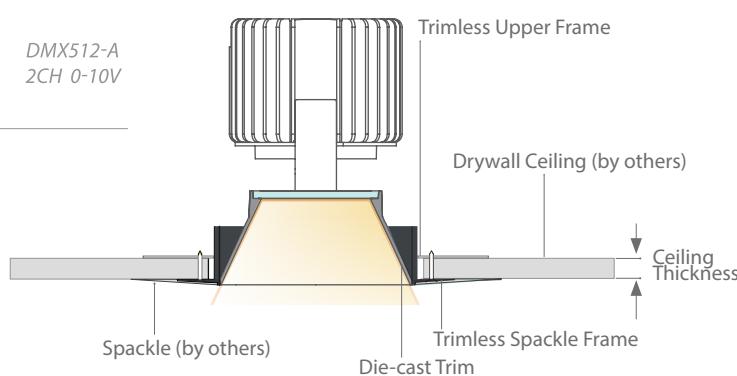

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761