

R4RWT, R4SWT

4.5" Volta Tunable White - Wall Wash Trim

WAC



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION


Volta 4.5" Tunable White recessed series represents an innovation in design and technology for architectural lighting. This high lumen and adaptable family of fixtures with a comprehensive set of round and square fittings, affords a sustainable solution for commercial, corporate, and upscale residential applications.

FEATURES

- Natural and vivid precision LED CCT Tuning
- Innovative bi-directional spread lens
- Engineered for even wall illuminations both vertically and horizontally
- Dual finishes are single piece, no physical seams
- 5 year WAC Lighting product warranty

SPECIFICATIONS

- Construction:** Durable die-cast self flanged aluminum construction
- Input:** Universal 120-277V AC 50/60 Hz
- Dimming:** 2 Channel 0-10V: 100-0.1%
2 Channel DMX512-A, with RDM: 100-0.1%
Linear Dimming. 1st input channel is intensity changing.
2nd input channel is CCT changing.
- Light Source:** High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70
- Mounting:** Heavy gauge retention clips support trim firmly.
Safety cabling standard.
Ceiling cut out (Round): $\varnothing 5\frac{1}{8}"$
Ceiling cut out (Square): $5\frac{1}{8}" \times 5\frac{1}{8}"$
Accommodates $\frac{1}{2}"$ - $1"$ ceiling thickness
- Finish:** Electrostatically powder coated White, Black.
Enamel coated Haze. Plated and brushed copper Bronze.
- Standards:** ETL & cETL Wet location listed, Title 24 JA8 Compliant

TRIM	Model	Beam	Lumens Ref Output*	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	R4RWT Round Trim R4SWT Square Trim	A	Round	1610	N/A	TWA 1800K-4000K	98	BK Black BKWT Black/White CB Copper Bronze HZ Haze HZWT Haze/White WT White
		Asym	Square	1940	N/A			
		A	Round	1620	N/A	TWB 2700K-6500K	98	
		Asym	Square	1950	N/A			

Example: **R4SWT-ATWA-WT**

*Reference output shows TWA/TWB trim tuned to 3000K with **36** housing. Use multiplier table below to determine the output for other combinations

Lumens & CBCP Multiplier		Color Temperature					
TWA (1800K-4000K)	Housing Power Level	1800K	2200K	2700K	3000K	3500K	4000K
	36 (44W)	0.68	0.82	0.94	1.00	1.07	1.11
	25 (29W)	0.48	0.57	0.66	0.70	0.75	0.78
	15 (20W)	0.33	0.39	0.45	0.48	0.51	0.53
TWB (2700K-6500K)	Housing Power Level	2700K	3000K	3500K	4000K	5000K	6500K
	36 (44W)	0.96	1.00	1.06	1.09	1.12	1.11
	25 (29W)	0.67	0.70	0.74	0.76	0.78	0.78
	15 (20W)	0.46	0.48	0.51	0.52	0.54	0.53

Example: **R4SWT-ATWA-WT** tuned to 4000K with **36** housing: 1940 lm (Reference Output) x 1.11 (Multiplier) = 2153 lm

Please see next page for housing, power supply and tool units (required)

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

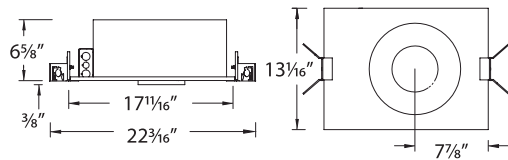
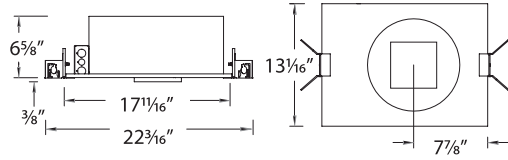

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

R4RWT, R4SWT

4.5" Volta Tunable White - Wall Wash Trim

WAC

Round New Construction 	R4RNT <i>Airtight</i>	<table border="1"> <tr> <td>15</td><td>20W</td><td>IC rated</td></tr> <tr> <td>25</td><td>29W</td><td>IC rated</td></tr> <tr> <td>36</td><td>44W</td><td>Non-IC</td></tr> </table> T-X DMX512-A T-Z 2CH 0-10V	15	20W	IC rated	25	29W	IC rated	36	44W	Non-IC
15	20W	IC rated									
25	29W	IC rated									
36	44W	Non-IC									
Square New Construction 	R4SNT <i>Airtight</i>	<table border="1"> <tr> <td>15</td><td>20W</td><td>IC rated</td></tr> <tr> <td>25</td><td>29W</td><td>IC rated</td></tr> <tr> <td>36</td><td>44W</td><td>Non-IC</td></tr> </table> T-X DMX512-A T-Z 2CH 0-10V	15	20W	IC rated	25	29W	IC rated	36	44W	Non-IC
15	20W	IC rated									
25	29W	IC rated									
36	44W	Non-IC									
Remodel 	R4BRT <i>Round or Square</i>	<table border="1"> <tr> <td>15</td><td>20W</td><td>Non-IC</td></tr> <tr> <td>25</td><td>29W</td><td>Non-IC</td></tr> <tr> <td>36</td><td>44W</td><td>Non-IC</td></tr> </table> T-X DMX512-A T-Z 2CH 0-10V	15	20W	Non-IC	25	29W	Non-IC	36	44W	Non-IC
15	20W	Non-IC									
25	29W	Non-IC									
36	44W	Non-IC									

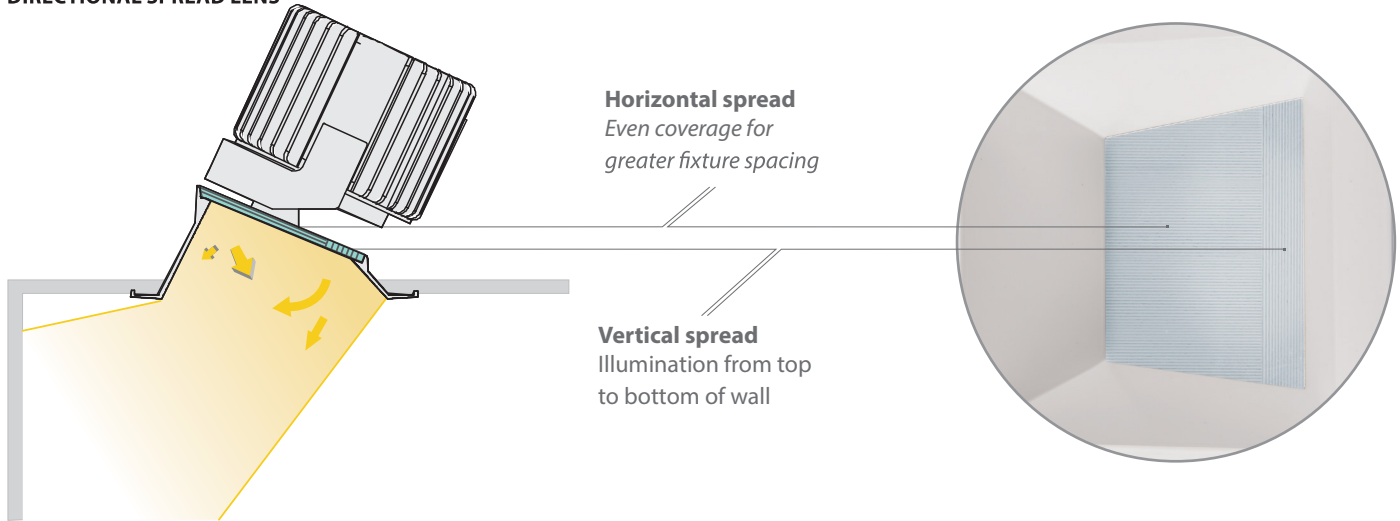
Example: R4RNT-15T-X

Field Replaceable Driver

D-R4N-15T-X DMX512-A Driver for 20W New Const. Housing
D-R4N-25T-X DMX512-A Driver for 29W New Const. Housing
D-R4N-36T-X DMX512-A Driver for 44W New Const. Housing

D-R4N-15T-Z 2CH 0-10V Driver for 20W New Const. Housing
D-R4N-25T-Z 2CH 0-10V Driver for 29W New Const. Housing
D-R4N-36T-Z 2CH 0-10V Driver for 44W New Const. Housing

BI-DIRECTIONAL SPREAD LENS



AVERAGE WALL ILLUMINANCE*

R4RWT-ATW at 3000K 10' CEILING	ON-CENTER SPACING				R4SWT-ATW at 3000K 10' CEILING	ON-CENTER SPACING			
	3'	4'				3'	4'		
DISTANCE FROM WALL	3'	20W 12 fc	20W 10 fc		DISTANCE FROM WALL	3'	20W 15 fc	20W 12 fc	
		29W 18 fc	29W 14 fc				29W 21 fc	29W 17 fc	
		44W 25 fc	44W 21 fc				44W 30 fc	44W 25 fc	
DISTANCE FROM WALL	4'	20W 10 fc	20W 8 fc		DISTANCE FROM WALL	4'	20W 12 fc	20W 10 fc	
		29W 15 fc	29W 12 fc				29W 18 fc	29W 15 fc	
		44W 21 fc	44W 17 fc				44W 25 fc	44W 21 fc	

*Results may vary depending on field conditions such as surface properties, ambient light levels, etc.

wacighting.com
 Phone (800) 526.2588
 Fax (800) 526.2585

Headquarters, East Manufacturing Facility
 44 Harbor Park Drive
 Port Washington, NY 11050

South East Manufacturing Facility
 1600 Distribution Ct
 Lithia Springs, GA 30122

Central Manufacturing Facility
 1700 South J Elmer Freeway, Ste 100
 Cedar Hill, TX 75104

West Manufacturing Facility
 1750 S Archibald Ave
 Ontario, CA 91761

R4RWT, R4SWT

4.5" Volta Tunable White - Wall Wash Trim



NATURAL TUNABLE WHITE CCT TUNING:

The CCT of the Volta Tunable White fixture may be adjusted.

Using the DMX byte values in the adjacent table mapped to CH1 and CH2 of the desired output, increments of 100K (Kelvin) from 1800K to 4000K for TWA and 2700K to 6500K for TWB, at full intensity.

Note: Through compatible RDM tool, fixture channels can be reassigned to desired consecutive channels. Factory default is DMX channel 1 and 2.

VOLTA 4.5" TUNABLE WHITE DMX BYTE VALUE VS CCT

TWA DMX BYTE VALUES AT FULL INTENSITY			TWB DMX BYTE VALUES AT FULL INTENSITY		
CCT (K)	CH1: Intensity	CH2: CCT	CCT (K)	CH1: Intensity	CH2: CCT
4000	255	255	6500	255	252
3900	255	250	6400	255	249
3800	255	240	6300	255	245
3700	255	230	6200	255	243
3600	255	219	6100	255	241
3500	255	207	6000	255	237
3400	255	196	5900	255	234
3300	255	186	5800	255	230
3200	255	176	5700	255	226
3100	255	163	5600	255	222
3000	255	153	5500	255	218
2900	255	140	5400	255	214
2800	255	130	5300	255	210
2700	255	117	5200	255	205
2600	255	105	5100	255	200
2500	255	92	5000	255	195
2400	255	79	4900	255	190
2300	255	66	4800	255	185
2200	255	51	4700	255	180
2100	255	38	4600	255	175
2000	255	23	4500	255	170
1900	255	10	4400	255	164
1800	255	0	4300	255	158
			4200	255	151
			4100	255	143
			4000	255	134
			3900	255	125
			3800	255	119
			3700	255	110
			3600	255	101
			3500	255	92
			3400	255	83
			3300	255	74
			3200	255	64
			3100	255	53
			3000	255	41
			2900	255	29
			2800	255	15
			2700	255	0

wacighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761