R2FRA1L

FQ Basic 2" - Round Adjustable Trimless

Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and 360° horizontal rotation, and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- Light engine mounted on trim with springs for easy replacement
- 0-35° vertical tilting and 365° horizontal rotation
- Center beam alignment retained throughout adjustment range
- Field changeable beam angle with reflectors provided
- Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction:	Durable die-cast aluminum construction
Input	Universal 120-277V AC 50/60 Hz
Dimming:	Electronic Low Voltage (ELV): 100%-1% TRIAC: 100%-1% 0-10V: 100-1%
Light Source:	High output 3-step Mac Adam Ellipse COB Rated life of 50,000 hours at L70
Mounting:	Heavy gauge retention clips support trim firmly. Safety cabling standard. Ceiling cutout: Ø 3 1/2" Accomodates 1/2 "- 1 " ceiling thickness
Finish:	Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.
Standards:	ETL & cETL Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant.

Model	*Model*	*Beam*	*Lumens*	*CBCP*	*Color Temp*	*CRI*	*Finishes*	*Reflector/Trim*
	**R2FRA1L** *Round Trimless*	*N 25°* *F 40°* *W 55°*	*1105* *1080* *1085*	*2875* *1845* *1385*	**927** *2700K*	*90*		
		N 25° *F 40°* *W 55°*	*1160* *1135* *1140*	*3025* *1940* *1460*	**930** *3000K*	*90*	**BK** *Black* **DB** *Dark Bronze* **HZ** *Haze* **WT** *White*	
		N 25° *F 40°* *W 55°*	*1185* *1160* *1165*	*3085* *1980* *1490*	**935** *3500K*	*90*		

R2FRA1L-__-__

Example: **R2FRA1L-927-BK** (Beam N-25° reflector is pre-installed. Beams F-40° and W-55° reflectors are included.)

Please see next page for housing units (required)

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. JULY 2023

R2FRA1L

FQ Basic 2" - Round Adjustable Trimless

HOUSING (Required)		*Model*	*Power*	
New Construction IC Airtight	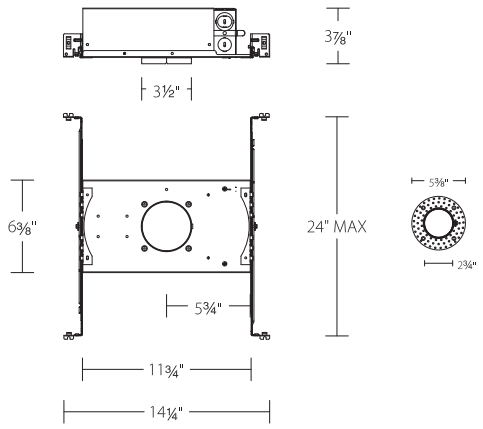	**R2FRN1L**	**1**	*15W IC*
Remodel Non-IC	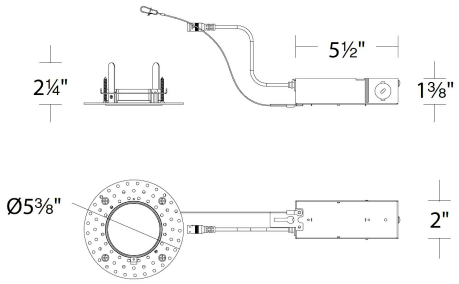	**R2FRRL**	**1**	*15W Non-IC*

R2FR___-___

Example: **R2FRN1L-1**

GLARE CONTROL ACCESSORIES

LENS-11-HCM	*Honeycomb Louver*
LENS-11P-CRL-BK	*Cross Louver*

LENS ACCESSORIES

LENS-11	**AMB**	*Amber*
	RED	*Red*
	BLU	*Blue*
	GRN	*Green*
	SPR	*Spread*
	BEL	*Beam Elongating*

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters/Eastern Distribution Center
44 Harbor Park Drive
Port Washington, NY 11050

Central Distribution Center
1600 Distribution Ct
Lithia Springs, GA 30122

Western Distribution Center
1750 Archibald Avenue
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. JULY 2023