

Fixture Type: Catalog Number: Project: Location: **SPECIFICATIONS****Construction:** Durable die-cast aluminum construction**Input** Universal 120-277V AC 50/60 Hz**Dimming:** Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100%-1%**Light Source:** High output 3-step Mac Adam Ellipse COB
Rated life of 50,000 hours at L70**Mounting:** Heavy gauge retention clips support trim firmly.
Safety cabling standard. Ceiling cutout: Ø 3 1/2"
Accommodates 1/2" - 1" ceiling thickness**Finish:** Electrostatically powder coated White, Black, Dark Bronze. Enamel coated Haze.**Standards:** ETL & cETL Damp Location Listed, Energy Star 2.0, Title 24 JA8 Compliant.**PRODUCT DESCRIPTION**

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- Light engine mounted on trim with springs for easy replacement
- 0-35° vertical tilting
- Center beam alignment retained throughout adjustment range
- Field changeable beam angle with reflectors provided
- Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

Model	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
	R2FSA1T Square Trim	N 25°	1110	2850	927	2700K	90	BK DB HZWT WT
		F 40°	1100	1855	930	3000K	90	
		W 55°	1105	1400	935	3500K	90	

R2FSA1T-__-__Example: **R2FSA1T-927-BK** (Beam N-25° reflector is pre-installed. Beams F-40° and W-55° reflectors are included.)

Please see next page for housing units(required)


R2FSA1T

FQ Basic 2" - Square Adjustable Trim

WAC

HOUSING (Required)

New Construction
IC Airtight

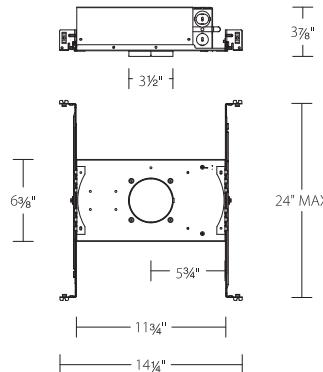

Model


Power

R2FBN1T

1

15W IC

New Construction Frame-in
Non-IC

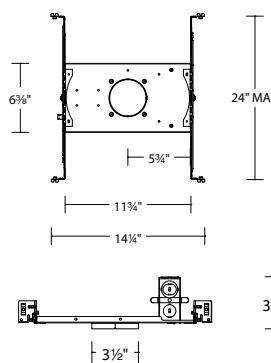


R2FBFT

1

15W Non-IC

Remodel
Non-IC



R2FBRT

1

15W Non-IC

R2FB _____ - _____

Example: **R2FBN1T-1**

GLARE CONTROL ACCESSORIES

LENS-11-HCM	Honeycomb Louver
LENS-11P-CRL-BK	Cross Louver

LENS ACCESSORIES

LENS-11	AMB RED BLU GRN SPR BEL	Amber Red Blue Green Spread Beam Elongating
----------------	--	--

waclighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91761