2" INGROUND - CIRCLE STEP LIGHT

2041

WAC LANDSCAPE LIGHTING

Fixture Type:

Catalog Number:

Project:

Location:

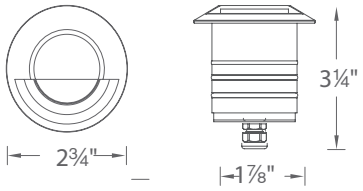

PRODUCT DESCRIPTION

Landscape 2" recessed luminaire for step and wall light applications.

FEATURES

- IP68 rated, Suitable for continuous immersion under water
- Factory sealed water tight fixtures
- Solid stainless steel construction
- Stainless steel spring clip allows wall or step light applications
- Spring clip, 6' lead wire and direct burial gel filled wire nuts included
- Maintains constant lumen output against voltage drop
- UL 1838 Listed

SPECIFICATIONS

Input: 9 - 15VAC (Transformer is required)
Power: 4.1W / 6.6VA (Use VA value for sizing the transformer and calculate voltage drop.)
Brightness: 50 lm
CRI: 85
Rated Life: 70,000 hours

ORDERING NUMBER

		Color Temp		Finish	
2041	*Circle Step*	**27** **30**	*2700K* *3000K*	**SS**	*Stainless Steel*

2041-30_____

Example: **2041-30SS**

waclighting.com
Phone (800) 526.2588
Fax (800) 526.2585

Headquarters, East Manufacturing Facility
44 Harbor Park Drive
Port Washington, NY 11050

South East Manufacturing Facility
1600 Distribution Ct
Lithia Springs, GA 30122

Central Manufacturing Facility
1700 South J Elmer Freeway, Ste 100
Cedar Hill, TX 75104

West Manufacturing Facility
1750 S Archibald Ave
Ontario, CA 91761

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program.

2" INGROUND - CIRCLE STEP LIGHT

2041

WAC LANDSCAPE LIGHTING

Magnetic Transformers

Stainless Steel, 12-15V output, IP65 rated, UL 1838 listed
See transformer spec sheet for details and its accessories

9075-TRN-SS	**9150-TRN-SS**	**9300-TRN-SS**	**9600-TRN-SS**
75W Max	*150W Max*	*300W Max*	*600W Max*

TESTED MAGNETIC LOW VOLTAGE(MLV) DIMMERS

Luminaire	Dimmer					
	Manufacturer	Family	Model	Power Rating	Range*	Note
2041	*Lutron*	*Diva*	*DVLV-600*	*600W*	*20% - 100%*	
		Skylark	*SLV-600P*	*600W*	*15% - 100%*	*Best performance*
		Skylark	*S-10P*	*1000W*		*Not recommended*

*Low end of this range is determined by output current which may not directly translate to the perceived light output

WAC Lighting fixtures are compatible with a variety of dimmers. For your convenience we have included a compatibility chart showing dimmers which have been tested with our products. The recommended list below is based upon testing conducted in a lab, and the results can vary in certain field applications due to a number of factors. Exclusion from the list does not imply incompatibility, just that it has not been tested by WAC Lighting. Please reference the dimmer manufacturer's instructions for installation, or contact a WAC lighting professional at 800-526-2588.