WAC LIGHTING

Constantine

Flush Mount 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-27214 14"	3000K	❍ AB Aged Brass ❍ BK Black	24.4W	1779	1571

Example: **FM-27214-BK**
For custom requests please contact customs@waclighting.com

FEATURES

- Faux alabaster. Like real stone, each piece is unique.
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, etched acrylic diffuser

REPLACEMENT PARTS

HDW-SY22-CE - Hardware Pack
RPL-DIF-27214 - Bottom Diffuser

FINISHES:



Aged Brass Black

LINE DRAWING



FM-27214

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2026

WAC LIGHTING

Constantine

Flush Mount 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
❍ FM-27218 18"	3000K	❍ AB Aged Brass ❍ BK Black	36.7W	2955	2473

Example: **FM-27218-BK**
For custom requests please contact customs@waclighting.com

FEATURES

- Faux alabaster. Like real stone, each piece is unique.
- Driver concealed within the canopy
- 5 Year warranty

SPECIFICATIONS

Color Temp:	3000K
Input:	120 VAC,50/60Hz
CRI	90
Dimming:	ELV: 100-10% , TRIAC: 100-10%
Rated Life:	50,000 Hours
Mounting:	Can be mounted on ceiling or wall in all orientations
Standards:	ETL, cETL, Title 24 JA8 Compliant, Damp Location Listed
Construction	Aluminum body, etched acrylic diffuser

REPLACEMENT PARTS

HDW-SY22-CE - Hardware Pack
RPL-DIF-27218 - Bottom Diffuser

FINISHES:



Aged Brass Black

LINE DRAWING

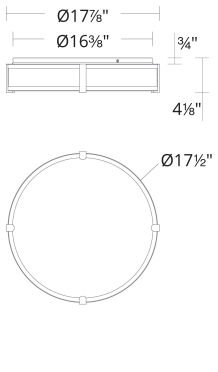

FM-27218

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. October 2026