WAC LIGHTING

6" 120V

Remodel Airtight Ready IC Housing

Fixture Type:

Catalog Number:

Project:

Location:

Model & Product

❍ R-603D-R-ICA 6in Line Voltage Remodel Ready IC-Rated Housing

Example: **R-603D-R-ICA**

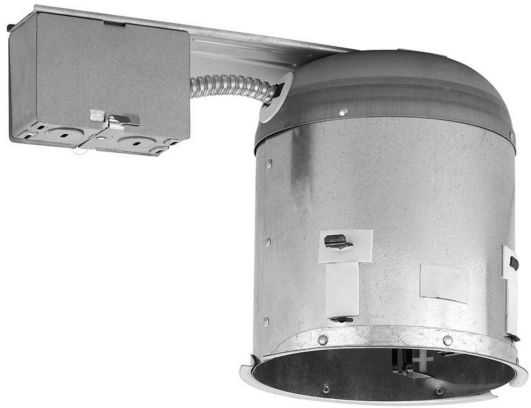

DESCRIPTION

Crafted from one-piece of spun aluminum and durable stamped metal. 6" Line Voltage Recessed Downlights are available with a full suite of trim options to ensure proper lamp position with low glare and superior photometric performance. The junction box includes seven knockouts and four Romex™ style wiring connectors for ease of installation. Thermal protector is included to prevent overheating from improper lamping. May be used with any WAC compatible Trims: R-620, R-633, R-651, R-656.

FEATURES

- See individual trims for max wattage
- 3" clearance on all sides when insulation is present
- Thermal protector (included) protects against over-lamping
- Certified airtight per ASTM E283, when used with RGK gasket kit (sold separately)
- Rated for branch and chain wiring
- J-Box and transformer accessible through ceiling
- Suitable for use in 2" x 6" joist installations
- Cutout: 6-7/16"
- 5 year warranty

SPECIFICATIONS

Construction	Housing is 20 gauge steel, painted white. Frame, junction box and hanger bars are heavy gauge galvanized steel.
Power:	75W
Input:	120 VAC,50/60Hz
Mounting:	Clips allow easy removal of housing.
Cut Out:	6.4375
Ceiling Thickness:	Up to 3/4"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Damp Location Listed, Airtight, IC

LINE DRAWING



WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026