WAC LIGHTING

Pop-In 4" Square 5CCT

Remodel Downlight

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
❍ R4DSDR	❍ F 45°	❍ 9CS 2700K/3000K/3500K/4000K/5000K - 90	1000 790	1256 1207	❍ BK Black ❍ WT White

Example: **R4DSDR-F9CS-BK**

FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Electrical box located on back of fixture to allow easy installation
- Sold as remodel, but new construction frame available
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction	Die-cast Aluminum with 20-gauge Cold Rolled Steel Junction Box
Power:	12W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling, Heavy gauge rentention clips secures fixture to ceiling
Cut Out:	4"
Finish:	Electrostatically Powder Coated: White, Black
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC

FINISHES:



Black White

LINE DRAWING

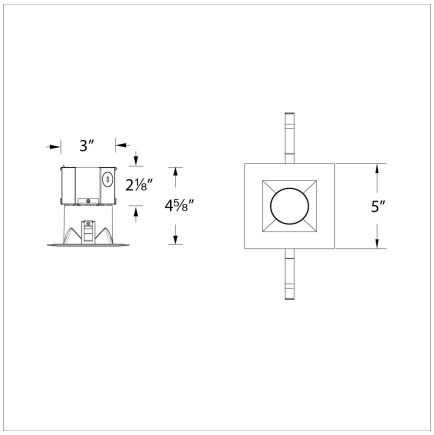

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026

WAC LIGHTING

Pop-In 4" Square 5CCT

Remodel Downlight

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

	Model	*Description*	*Finish*
	R4DRDN-FRAME	Downlight Frame In Kit	

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. November 2026